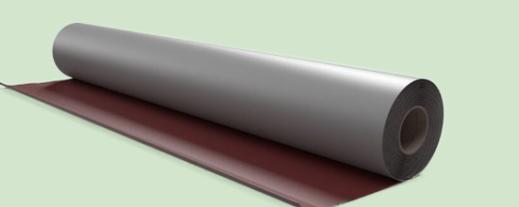


# CABLE FIREPROOFING APPLICATION COSTS

Process Step		Cable Coating Spray Applied	Pyro Safe- Cable Wrap	Wrap Savings \$
Preperation, Pre - Install and Logistics	Material Cost	\$50 per sqm	\$80 per sqm	\$↑
	Overspray (material waste)	Cost of overspray of cable coating- \$15-20 per sqm( average estimate)	✓ NIL	\$↓
	Plastic Masking	Mask area to avoid overspray 	✓ NIL	\$↓
	Pre- Cleaning of Cables	Clean cables to allow coating to adhere- This can be VERY expensive and cause damage to cables  	✓ NIL	\$↓
	Specialist Equipment	Compressor, Spray machinery, spray tips 	✓ NIL	\$↓
	Transport to Site	Transport Bulk material and specialist equipment to site  	✓ Light textile material 	\$↓
Installation and Waste Disposal	Installation Complexity	Spray coating to achieve 1.6mm DFT   Hard to coat evenly, Carefully check thicknesses to ensure compliance 	Cut, wrap & apply band and clip  ✓ Simple: • Wrap thickness is pre-defined. • Guaranteed performance	\$↓
	Waste Disposal	<ul style="list-style-type: none"> <li>Remove masking</li> <li>Transport empty drums and masking material from site</li> <li>Dispose of empty drums and soiled masking material</li> </ul> 	✓ Cardboard in site recycling bin 	\$↓
	Plant Upgrades: Changes to cable distribution	<p><b>New cables</b> Will require additional cable coating</p> <p><b>Old cable removal and redeployment</b> Cannot remove from coated bundle</p>	<p>✓ Open wrap, add cable, re-close wrap</p> <p>✓ Open wrap,remove cable, re-close wrap</p>	<p>\$↓</p> <p>\$↓</p>
<b>Overall Costs</b>		\$↑	\$↓	