

CASE STUDY

March 2020



FyreBOX™ Cast-In

Trafalgar’s technical team met with the builder’s Quality Assurance Manager and the mechanical contractor and discussed potential options, with the FyreBOX™ Cast-In being proposed as the optimal solution.

Using the FyreBOX™ Cast-In the penetrations were established by the FireBOX design during the concrete pour. The refrigerant pipes, electrical and data cables were run through the FyreBOX™ and floor without a need for spacing

THE CHALLENGE

On previous projects, the mechanical contractor had traditionally run pipes through separate penetrations and used a collar on each or had paid concreters to form larger riser shaft openings.

This traditional method was labour intensive, increased the service penetration footprint and posed risks of potential compliance issues relating to penetration spacing, therefore the contractor was looking for a better solution.

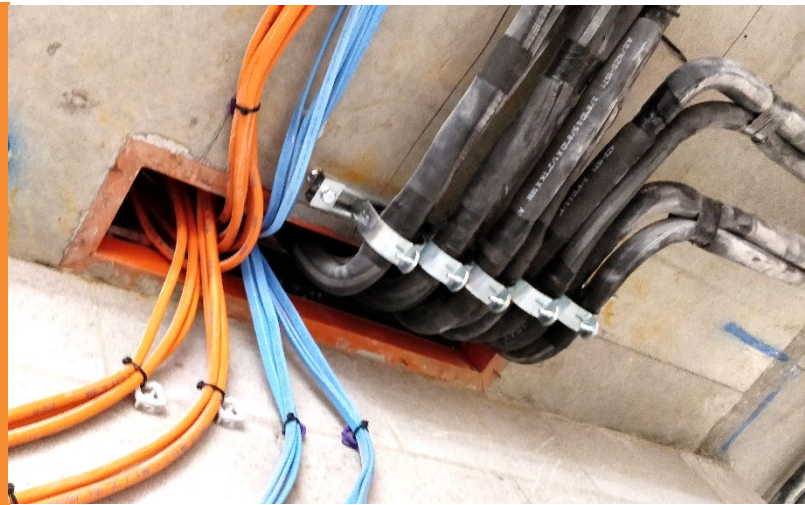


Image shows the underside of a FyreBOX™ Cast-In penetration, refrigerant pipe, electrical and data cables without spacing penetrating through the floor.

THE DELIVERY

- **Saves time and money** -no drilling or cutting the concrete
- **Simple** - nailed into form work on each level and concrete poured around
- **Fire rated penetrations** - established in the concrete
- **Large services capacity** – the mechanical plant room pipe load was managed by multiple FyreBOX™ Cast-In with 100mm spacings.
- **Small footprint** – less building space required due to lower spacing requirements
- **Fire tested and fully approved to AS1530.4 and AS4072.1.**



Image shows FyreBOX™ Cast-In in freshly poured concrete slab ready for the lid to be removed and services run.

	<p>Product FyreBOX™ Cast-In</p>
	<p>Size 60 apartments 9 storey</p>
	<p>Trades  HVAC&R</p>