

DESCRIPTION

Ryanspan is a very pliable laminated strip consisting of multiple layers of intumescent graphite sandwiched between layers of combustion modified foam.

Ryanspan provides a high level of movement and is suitable for gaps up to 100mm and provides up to 2 hours fire protection. It is a quick and easy solution to install with minimal mess and clean-up.

CERTIFICATION

Ryanspan has been tested at IANZ/NATA accredited laboratories, in accordance with the following standards:

| | |
|---------------|------------------------------|
| Fire | AS1530.4:2014, AS4072.1:2005 |
| Acoustic | ISO 10140-2 |
| Environmental | ASTM-B117:2011 |

APPLICATION

Ryanspan is suitable for use within construction joints and voids that require a high degree of flexible movement and fire resistance. Ryanspan can be installed both vertically and horizontally.

PRODUCT DIMENSIONS



Ryanspan is available in the following sizes :

25mm x 25mm x 1m
50mm x 50mm x 1m
75mm x 50mm x 1m
100mm x 100mm x 1m

Colour : Black



Ryanspan is used to provide a soft seal to movement joints. Please contact the technical department for specific and more detailed "V" drawings.

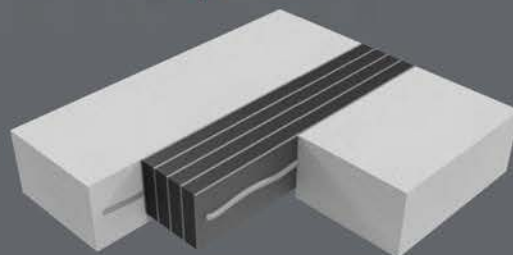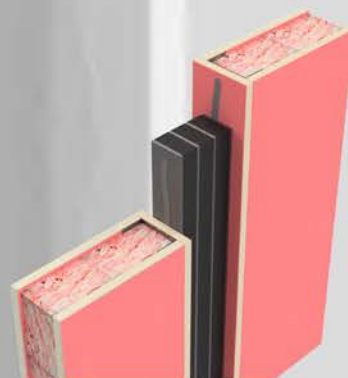

FEATURES

- Tested to AS1530.4:2014
- Highly flexible
- Vertical/horizontal applications
- Easy to install
- Up to 120mins FRR