





ACTIVE WET & DRY FIRE

SuperSTOPPER® Slab-Mount Bambino



The SuperSTOPPER® Slab Mount Bambino is a head of wall service penetration system specifically manufactured for individual trades to simplify passive fire by allowing installation of pipe and cable services before the wall construction, providing predictable site costs with the independence from other contractors schedules, and a reliable method of fire stopping.







KEY FEATURES

- Sprinkler pipes penetrations can be installed before walls are constructed
- No need to install couplings on sprinkler pipes
- Suitable for both pipes and cables in the same penetration
- Tested with Firesence alarm and other cables
- Tested for steel and CPVC sprinklers
- Tested with multiple services with no separation required between
- Suitable for apartment entry, riser shaft and commercial wall penetrations
- Fully tested and compliant to AS1530.4-2014
- Training and support provided

APPROVED SERVICES

Steel Pipes	Up to NB60
CPVC	Pipes up to 60mm
Firesense	Alarm cables
Power	Copper and Aluminum cores
Data/Comms	All cables
PVC	Drain pipes and conduits up to 32mm

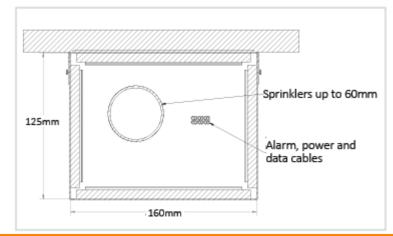




TABLE OF CONTENTS



Sect	ion	Page
WH	Y SuperSTOPPER® for Active Fire Service Trades	4
Sup	erSTOPPER® Benefits- 30% Labour Savings	5
Syst	em Selector	6
Fire	Resistance Level	7
	60 Minute Plasterboard Stud Walls: WRAP FREE	8
	60 Minute Walsc® AAC Panel: WRAP FREE	9
	60 Minute Concrete, Masonry and Permanent Formwork Walls: WRAP FREE	10
	60 Minute IntrWall & Other Party Wall Systems	11
	60 Minute XCEM Alpha Panel walls	12
	90 Minute Walsc® AAC Panel	13
seles	90 Minute Plasterboard Stud Walls	14
FRL Tables	90 Minute Laminated Plasterboard Shaft Walls	15
# E	90 Minute XCEM Alpha Panel Walls	16
	120 Minute Plasterboard Stud Walls	17
	120 Minute Concrete, Masonry and Permanant Formwork Walls	18
	120 Minute Walsc® AAC Panels	19
	Speedpanel® Walls	20
	Trafalgar COREX Shaft Walls	21
	Maxilite Board Bulkheads & Oversized Penetrations	22
	Stage 1: Slab-Mount the SuperSTOPPER®- All Walls	23
nual	Stage 2: Wall Installation- Plasterboard and COREX	24
Man	Stage 2: Wall Installation- Walsc® and Hebel AAC Panel Wall	25
Installation Ma	Stage 2: Wall Installation- AlphaPanel	26
stalla	Stage 2: Wall Installation- Speedpanel®	27
_ <u>=</u>	Stage 3: Foam Installation- All Walls	28
	Stage 4: Wrapping- All Walls	29





TABLE OF CONTENTS

Se	ction	Page
	Installation Alternatives: Riser Shaft	30
nal	Installation Alternatives: Stepped slab, Wall junctions, oversized openings	31
Man	Installation Alternatives: SuperSTOPPER® Double Vertical	32
Installation Manual	Installation Alternatives: SuperSTOPPER® Double Horizontal	33
stalla	Installation Alternatives:IntRWall/Party Walls	34
<u>n</u>	Installation Checklist - Plasterboard	35
	Installation Checklist- Walsc® and Hebel AAC Panel Wall	36
Sys	stem Range	37
Со	mpliance	38
	Product Overview	39
	Installation Overview	40
	Plasterboard Framing Details	41
	Standard Plasterboard Walls	42
	Plasterboard Walls- Built From One Side Only	43
	Shaftliner Walls	44-45
	Hebel®/Walsc® and AAC Walls- Openings up to 400x170mm	46
S	Hebel®/Walsc® and AAC Walls- Openings greater than 400x170mm	47
win	Hebel® Walls- FR Plasterboard Lining	48
Dra	SpeedPanel® Walls	49
ical	SpeedPanel® Walls Less Than 78mm Thick	50
Technical Drawings	Concrete / Masonry Walls	51
-	FyreBOARD™ Maxilite	52
	TWRAP™ - Services Wrap	53
	TWRAP™ - 3-Sided Wrap	54
	SuperSTOPPER® Slab-Mount Stacked Horizontal	55
	SuperSTOPPER® Slab-Mount Stacked Vertical	56
	TWRAP™ - Services Horizontal	57
	TWRAP™ - Stacked Vertical	58
	SuperSTOPPER Slab Mounted installed with access from one side	59
	SuperSTOPPER In Close Proximity- Walls	60







WHY SuperSTOPPER® for Active Fire Services

In residential and commecial constructions, the active fire trades are often the first on site to start running spinkler pipes and fire systems cables under the slab soffit, before the fire compartment walls have been erected. This results in additional work for the fire contractors who have to install pipe couplings on each side of the fire walls to remove sections of the pipes to allow the walls to be installed, and/or defects where services are left penetrating through the head tracks of the fire wall.

The innovative Trafalgar SuperSTOPPER® Slab Mount BAMBINO (lower right) addresses these issues by providing a small footprint penetration system that can be installed before the walls are erected, allowing for the fire pipes and cables to be roughed in, commissioned and charged without waiting for the wall contractors.

The SuperSTOPPER® systems are tested with all common active fire services for residential and commercial projects through one simple penetration system providing FRL's from -/60/60 (wrap free) to -/120/120. The SuperSTOPPER® systems have been tested located at the head track/deflection heads in FULL SCALE wall tests to confirm their suitability in these locations.

BENEFITS

- Install sprinkler pipes/cables before the fire walls
- No need for wraps (in most walls)
- · Charge, test and commission fire services quicker
- Less leak points in spinkler systems
- Reduced defects
- Predictable fire stopping costs
- NCC 2022 Ready
- Thoroughly fire tested to AS1530.4-2014
- Visible and reliable compliance
- Space saving gives one penetration point per apartment
- Suitable for SOU and riser shaft penetrations
- Multi-service solution
- Maintains acoustic rating
- Saves time and labour for builders and service trades



WITHOUT




Traditional fire sealant penetration systems need the fire walls to be installed first, requiring extra couplings for pipes (above). Fire cables (below) cause defects when run through deflection heads.



WITH SUPERSTOPPER®











The SuperSTOPPER® Slab-Mount is a proudly Australian made passive fire penetration system used for multiple and mixed service penetrations which has been designed and tested to be built into residential/commercial apartment walls and riser shafts reducing the space required for service penetrations, providing predictable site costs and a reliable method of fire stopping.

Passive Fire Protection from Trafalgar Fire a Brand you can Trust, with 75 years of Innovation.







TAKE BACK CONTROL OF YOUR PROJECT TIMEFRAMES

Re-think the sequencing of rough in, charging, leak testing and commissioning by pre-installing the penetration systems independently of other site trades.









1	Benefits	Traditional sealant & wrap systems	SuperSTOPPER® BAMBINO
	Penetration installed before the fire walls?	No	Yes
	Services installed hard against slab soffit?	No	Yes
	Multiple services in one penetration?	No	Yes
	Separation between different servies?	No	Yes
	Allows for future services to be added?	No	Yes
	Doesnt need large fillets of selant for wrap free systems?	No	Yes
	Other service trades can share the same penetration?	No	Yes
	100's of cables in one penetration?	No	Yes























FIRE RESISTANCE LEVEL

FIRE RATING – HOW IS FIRE PERFORMANCE MEASURED?

An FRL (fire resistance level) is a handy way of summarising the performance of a building element. It consists of 3 numbers, all given in minutes:





Structural Adequacy

The ability of the building element to support the weight of adjacent building elements.

ie: a brick wall supporting a concrete floor slab above.



Integrity

The ability of an element to prevent the passage of flames and hot gasses.

ie: a plasterboard wall remaining intact and not allowing holes to form.



Insulation

The ability of an element to resist heat transfer from the exposed face to the unexposed face.

ie: a bundle of cables remaining below a set temperature limit on the unexposed side of the wall penetration system.

Note: Penetrations are not required to have a Structural Adequacy rating and is usually expressed as a dash. For example, a penetration through a 2 hour load bearing wall would be written as -/120/120.

INTEGRITY

The SuperSTOPPER® Slab-Mount system will achieve the integrity performance for up to 2 hours physically stopping the direct spread of fire, however the insulation performance of the penetration will be limited to the type of wall being used and conductivity of the services in the penetration.

INSULATION (TEMPERATURE RISE)

Heat transfer via conduction (or heat rise) will occur through the conductive parts of any penetration system. To limit the heat rise through the SuperSTOPPER® Slab-Mount penetration systems, our 25mm thick TWRAP™ foil encased blanket can be wrapped around the services and metal casing of the SuperSTOPPER® to achieve up to 2 hours of insulation performance. There are some applications that won't require any TWRAP™ to achieve the full FRL, please refer to the tables below for specific details.





60 Minute Plasterboard Stud Walls WRAP FREE

Minimum of 13mm fire grade plasterboard on each face of steel or timber stud, of minimum 64mm thickness with a stated FRL of -/60/60



Click

			FRL - WRAP FREE		
Service Type	Serv	64mm stud*	92mm studs		
	PVC Pipes	Up to 32mm OD	-/60/30	-/60/60	
		Up to 20mm	-/60/30	-/60/60	
	PEX Pipes	Up to 32mm	-/60/30	-/60/60	
		Up to 32mm with 19mm E-Flex insulation	-/60/30	-/60/60	
Plastic Pipes		Up to 25mm	-/60/30	-/60/60	
	PEX-Al-PEX pipes	Up to 32mm	-/60/-	-/60/-*	
		Up to 32mm with 19mm E-Flex insulation	-/60/30	-/60/60	
	-DVC Din	Up to 40mm	-/60/-	-/60/-*	
	cPVC Pipes	40mm to 60mm	-/60/30	-/60/60	
Down Matal Dings	Copper	Up to 50mm	-/60/-	-/60/-*	
Bare Metal Pipes	Steel	up to 60mm	-/60/30	-/60/60	
		Up to 50mm OD with PE insulation up to 20mm thick	-/60/30	-/60/30*	
Metal Pipes	Copper	Up to 50mm OD with FR insulation	-/60/30	-/60/60	
Insulated**		Up to 20mm OD with 38mm rockwool-type insulation	-/60/30	-/60/60	
	Pair coil	Up to 9.5 & 19mm with 20mm FR insulation (or 13mm PE)	-/60/30	-/60/60	
	TPS	Up to 12x 2.5mm² per bundle	-/60/30	-/60/60	
Power Cables - Copper Core	Rigid or Flexible PVC Conduits	Up to 32mm OD (with any size power or comms cables up to 32mm diameter)	-/60/30	-/60/60	
35pps. 3010	AS1530.4 Appendix D1 cable set	Applies to copper core power cables and cable trays up to 1000mm wide	-/60/30	-/60/30*	
Power Cables - Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)	-/60/30	-/60/30*	
	RG6 coax	Up to 3x per bundle	-/60/30	-/60/60	
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/60/30	-/60/60	
Conduits	Rigid or Flexible PVC Con- duits	Up to 32mm OD (with any size power or comms cables up to 32mm diameter)	-/60/30	-/60/60	

^{*}TWrap required on these specific services to acheieve -/60/60 FRL. Refer to FC10266 for details in specific wall types.

^{**}With or without heat trace cable.



60 Minute AAC Panels WRAP FREE

Hebel, Waslc or other AAC panels 75mm thick when used for-/60/60 applications. **Note: 30mm Maxilite board can be laminated on one side of the penetration to increase the insulation performance without the need for TWrap as shown below (WRAP FREE).**



		FRL - WRAP FREE	
Service Type		+ 30mm Maxilite	
	PVC Pipe	Up to 32mm OD	-/60/60
		Up to 20mm	-/60/60
	PEX Pipes	Up to 32mm	-/60/60
		Up to 32mm with 19mm E-Flex insulation	-/60/60
Plastic Pipes	DEM VI DEM	Up to 25mm	-/60/60
	PEX-Al-PEX pipes	Up to 32mm	-/60/-*
		Up to 32mm with 19mm E-Flex insulation	-/60/60
	21.2	Up to 40mm	-/60/-*
	cPVC Pipes	40mm to 60mm	-/60/60
D	Copper	Up to 50mm	-/60/-*
Bare Metal Pipes	Steel	Steel up to 60mm	
		Up to 50mm OD with PE insulation up to 20mm thick	-/60/60
	Copper	Up to 50mm OD with FR insulation	-/60/60
Metal Pipes Insulated**		Up to 20mm OD with 38mm rockwool-type insulation	-/60/60
	Pair coil	Up to 9.5 & 19mm with 13mm PE insulation	-/60/60
	Pair coil	Up to 9.5 & 19mm with 20mm FR insulation	-/60/60
	TPS	Up to 12x 2.5mm² per bundle	-/60/60
Power Cables - Copper Core	Rigid or Flexible PVC Conduits	Up to 32mm OD (with any size power or comms cables up to 32mm diameter)	-/60/60
соррег соге	AS1530.4 Appendix D1 cable set	Applies to copper core power cables and cable trays up to 1000mm wide	-/60/30*
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)	-/60/30*
	RG6 coax	Up to 3x per bundle	-/60/60
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/60/60
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with any size power or comms cables up to 32mm diameter)	-/60/60

^{*}TWrap required on these specific services to acheieve -/60/60 FRL. Refer to FC10266 for details in specific wall types.

^{**}With or without heat trace cable.



60 Minute Concrete, Masonry and Permanant Formwork Walls: Wrap Free

Walls designed as per AS3600 or AS3700 (or otherwise fire tested to achevied the required FRL with a minimum thickness as per the 90mm) including Dincel, AFS, Logicall etc.



Service Type	Service Specification		FRL (Wrap Free)
	PVC Pipes	Up to 32mm OD	-/60/60
	PEX Pipes	Up to 20mm	-/60/60
	PEX Pipes	Up to 32mm	-/60/60
Plastic Pipes		Up to 20mm	-/60/60
i lustic i ipes	PEX-Al-PEX pipes	Up to 25mm	-/60/60
		Up to 32mm	-/60/-*
	aDVC Dinas	Up to 40mm	-/60/-*
	cPVC Pipes	40mm to 60mm	-/60/60
	Copper	Up to 50mm	-/60/-*
Bare Metal Pipes	Steel	up to 60mm	-/60/60***
		Up to 50mm OD with PE insulation up to 20mm thick	-/60/60
	Copper	Up to 50mm OD with FR insulation	-/60/60
Metal Pipes Insulated**		Up to 20mm OD with 38mm rockwool-type insulation	-/60/60
	Pair coil	Up to 9.5 & 19mm with 13mm FR insulation	-/60/60
	Tull Coll	Up to 9.5 & 19mm with 20mm FR insulation	-/60/60
	TPS	Up to 12x 2.5mm² per bundle	-/60/60
Power Cables - Copper Core	Rigid or Flexible PVC Con- duits	Up to 32mm OD (with any size power or comms cables up to 32mm diameter)	-/60/60
	AS1530.4 Appendix D1 cable set	Applies to copper core power cables and cable trays up to 1000mm wide	-/60/60
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)	-/60/60
	RG6 coax	Up to 3x per bundle	-/60/60
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/60/60

^{*}TWrap required on these specific services to acheieve -/60/60 FRL. Refer to FC10266 for details in specific wall types.

^{***} Wrap free approval for this service applies to walls minimum 118mm thick, otherwise 300mm TWrap is required on the pipe.



^{**}With or without heat trace cable.

60 minute IntrWall & Other Party Wall Systems

SuperSTOPPER® can penetrate the core of the wall, which is laminated with at least 1x16mm fire grade plasterboard on one side (or 1x layer of 13mm on both sides of the shaftliner core).



Service Type	S	ervice Specification	FRL Wrap Free*	FRL with TWRAP™	TWrap Length required (mm)
	PVC Pipes	Up to 32mm OD	-/60/30		300
		Up to 20mm	-/60/30		300
	PEX Pipes	Up to 32mm	-/60/30		450
		Up to 32mm with 19mm E-Flex insulation	-/60/30		300
Plastic Pipes		Up to 25mm	-/60/30		300
	PEX-Al-PEX pipes	Up to 32mm	-/60/-		450
		Up to 32mm with 19mm E-Flex insulation	-/60/30		300
	cDVC Dinos	Up to 40mm	-/60/-		300
	cPVC Pipes	40mm to 60mm	-/60/30		300
Bare Metal Pipes	Copper	Up to 50mm	-/60/-	-/60/60	300
bare Metal Pipes	Steel	up to 60mm	-/60/30		300
	Copper	Up to 50mm OD with PE insulation up to 20mm thick	-/60/30		300
Metal Pipes		Up to 50mm OD with FR insulation	-/60/30		300
Insulated**		Up to 20mm OD with 38mm rockwool-type insulation	-/60/30		300
	Pair coil	Up to 9.5 & 19mm with 20mm FR insulation (or 13mm PE)	-/60/30		300
Power Cables -	TPS	Up to 12x 2.5mm² per bundle	-/60/30		300
Copper Core	AS1530.4 Appendix D1 cable set	Applies to copper core power cables and cable trays up to 1000mm wide	-/60/30		300
Power Cables - Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)	-/60/30		300
Communications	RG6 coax	Up to 3x per bundle	-/60/30		300
Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/60/30		300
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with or without cables)	-/60/30		300

^{*}If using SuperSTOPPER® without TWrap for FRL's up to -/60/30, the wall must be thickenned with 60mm Maxilite board 100mm strips on one side.

^{**}Heat trace cables may be installed underneath thermal lagging through a SuperSTOPPER® penetration



60 minute XCEM Alpha Panel walls

Type 1 - 35mm Alpha Panel, framed with stud and lined on the other face with 13mm fire grade plasterboard (88mm minimum thickness)

Type 2 - 35mm Alpha Panel, framed with stud on both sides, lined on both faces with 13mm fire grade plasterboard (200mm minimum thickness)



				FRL - WRAP FREE		FRL with TWRAP™	
Service Type	Servi	ice Specification	Type 1	Type 2	Both walls	Length required (mm)	
	PVC Pipes	Up to 32mm OD	-/60/30	-/60/60		300	
		Up to 20mm	-/60/30	-/60/60		300	
	PEX Pipes	Up to 32mm	-/60/30	-/60/60		450	
	. 27.1.1900	Up to 32mm with 19mm E-Flex insulation	-/60/30	-/60/60		300	
Plastic Pipes		Up to 25mm	-/60/30	-/60/60		300	
	PEX-Al-PEX pipes	Up to 32mm	-/60/-	-/60/-		450	
		Up to 32mm with 19mm E-Flex insulation	-/60/30	-/60/60		300	
	D) (O D)	Up to 40mm	-/60/-	-/60/-		300	
	cPVC Pipes	40mm to 60mm	-/60/30	-/60/60		300	
Dave Metal Dines	Copper	Up to 50mm	-/60/-	-/60/-	-/60/60	300	
Bare Metal Pipes	Steel	up to 60mm	-/60/30	-/60/60		300	
		Up to 50mm OD with PE insulation up to 20mm thick	-/60/30	-/60/30		300	
Metal Pipes	Copper	Up to 50mm OD with FR insulation	-/60/30	-/60/60		300	
Insulated*		Up to 20mm OD with 38mm rockwool-type insulation	-/60/30	-/60/60		300	
	Pair coil	Up to 9.5 & 19mm with 20mm FR insulation (or 13mm PE)	-/60/30	-/60/60		300	
Power Cables -	TPS	Up to 12x 2.5mm² per bundle	-/60/30	-/60/60		300	
Copper Core	AS1530.4 Appendix D1 cable set	Applies to copper core power ca- bles and cable trays up to 1000mm wide	-/60/30	-/60/30		300	
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)	-/60/30	-/60/30		300	
	RG6 coax	Up to 3x per bundle	-/60/30	-/60/60		300	
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/60/30	-/60/60		300	
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with or without cables) underneath thermal lagging through a	-/60/30	-/60/60		300	

*Heat trace cables may be installed underneath thermal lagging through a SuperSTOPPER® penetration



90 Minute AAC Panels

Hebel, Waslc or other AAC panels 75mm thick with a stated FRL up to -/90/90. Note if this wall is used for a-/60/60 apartment entry, please refer to page 9.



Service Type	Service Specification		FRL - WRAP FREE	FRL-With 300mm TWRAP	
	PVC Pipes	Up to 32mm OD	-/90/30	-/90/90	
	PEX Pipes	Up to 20mm	-/90/30	-/90/90	
		Up to 32mm	-/90/30	-/90/90 (450mm TWrap)	
		Up to 32mm with 19mm E-Flex insulation	-/90/30	-/90/90	
Plastic Pipes		Up to 20mm	-/90/30	-/90/90	
riastic ripes		Up to 25mm	-/90/30	-/90/90	
	PEX-Al-PEX pipes	Up to 32mm	-/90/0	-/90/90 (450mm TWrap)	
		Up to 32mm with 19mm E-Flex insulation	-/90/30	-/90/90 (450mm TWrap)	
	cPVC Pipes	Up to 40mm	-/90/0	-/90/90	
	ci ve ripes	40mm to 60mm	-/90/30	-/90/90	
Bare Metal Pipes	Copper	Up to 50mm	-/90/0	-/90/90	
bare Wetar Fipes	Steel	up to 60mm	-/90/30	-/90/90	
		Up to 50mm OD with PE insulation up to 20mm thick	-/90/30	-/90/90	
	Copper	Up to 50mm OD with FR insulation	-/90/30	-/90/90	
Metal Pipes Insulated*		Up to 20mm OD with 38mm rockwool-type insulation	-/90/30	-/90/90	
	Pair coil	Up to 9.5 & 19mm with 13mm PE insulation	-/90/30	-/90/90	
		Up to 9.5 & 19mm with 20mm FR insulation	-/90/30	-/90/90	
	TPS	Up to 12x 2.5mm² per bundle	-/90/30	-/90/90	
Power Cables - Copper Core	AS1530.4 Appendix D1 cable set	Applies to copper core power cables and cable trays up to 1000mm wide	-/90/30	-/90/90	
	Rigid or Flexible PVC Conduits	Up to 32mm OD (with any size power or comms cables up to 32mm diameter)	-/90/30	-/90/90	
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm ² , 4×120 mm ² and 9×70 mm ² per bundle (16x cables total)	-/90/30	-/90/90	
	RG6 coax	Up to 3x per bundle	-/90/30	-/90/90	
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/90/30	-/90/90	
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with any size power or comms cables up to 32mm diameter)	-/90/30	-/90/90	

^{*}With or without heat trace cable



90 Minute Plasterboard Stud Walls

Minimum of 16mm fire grade plasterboard on each face of a steel or timber stud of minimum 64mm thickness, with a stated FRL of -/90/90.



Service Type	Serv	ice Specification	FRL (Wrap Free)	FRL with TWRAP™	TWRAP™ Length required (mm)
	PVC Pipes	Up to 32mm OD	-/90/60		300
		Up to 20mm	-/90/60		300
	PEX Pipes	Up to 32mm	-/90/60		450
		Up to 32mm with 19mm E-Flex insulation	-/90/60		300
Plastic Pipes		Up to 25mm	-/90/60		300
	PEX-Al-PEX pipes	Up to 32mm	-/90/-		450
		Up to 32mm with 19mm E-Flex insulation	-/90/30		300
	DVC Div.	Up to 40mm	-/90/-		300
	cPVC Pipes	40mm to 60mm	-/90/60		300
	Copper	Up to 50mm	-/90/-		300#
Bare Metal Pipes	Steel	up to 60mm	-/90/30		300#
		Up to 50mm OD with PE insulation up to 20mm thick	-/90/30		300
Metal Pipes	Copper	Up to 50mm OD with FR insulation	-/90/30	-/90/90	300
Insulated*		Up to 20mm OD with 38mm rockwool-type insulation	-/90/30		300
	Pair coil	Up to 9.5 & 19mm with 20mm FR insulation (or 13mm PE)	-/90/30		300
	TPS	Up to 12x 2.5mm² per bundle	-/90/30		300
Power Cables - Copper Core	AS1530.4 Appendix D1 cable set	Applies to copper core power ca- bles and cable trays up to 1000mm wide	-/90/30		300
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)	-/90/30		300
	RG6 coax	Up to 3x per bundle	-/90/30		300
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/90/30		300
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with or without cables)	-/90/60		300

^{*}Heat trace cables may be installed underneath thermal lagging through a SuperSTOPPER® penetration #With 300mm of loose TWrap infill packed around any cable tray services within the wrap.



Click here to go back to Contents

90 Minute Laminated Plasterboard Shaft Walls

Minimum of 3x fire grade plasterboard on one side of a steel stud with a stated FRL of 90 or 120 minutes. SuperSTOPPER® penetration thicknenned with 60mm Maxilite in 100mm strips on one side of the pene-



Sorvice Tune	Service Specification		Plasterboard outside minimum 64mm stud (FRL wrap Free)		FRL with	TWrap Length required
Service Type	Se	rvice specification	3x13mm plaster	3x16mm plaster	TWRAP	required (mm)
	PVC Conduits	Up to 32mm OD	-/90/30	-/120/30		300
		Up to 20mm	-/90/30	-/120/30		300
	PEX Pipes	Up to 32mm	-/90/30	-/120/30		450
	T EXTIPCS	Up to 32mm with 19mm E-Flex insulation	-/90/30	Not approved		300 (-/90/90 only) only)
Plastic Pipes		Up to 25mm	-/90/30	-/120/30		450
	PEX-Al-PEX pipes	Up to 32mm	-/90/-	-/120/30		450
		Up to 32mm with 19mm E-Flex insulation	-/90/30	Not approved		300 (-/ 90/90 only)
	-DVC Div	Up to 40mm	-/90/-	-/120/-		300
	cPVC Pipes	40mm to 60mm	-/90/30	-/120/30		300
Bare Metal Pipes	Copper	Up to 50mm	-/90/-	-/120/-		300
bare metal ripes	Steel	up to 60mm	-/90/30	-/120/30	-/120/120 (Limited to the FRL of the wall)	300
	Copper	Up to 50mm OD with PE insulation up to 20mm thick	-/90/30	-/120/30		300
Metal Pipes		Up to 50mm OD with FR insulation	-/90/30	-/120/30		300
Insulated**		Up to 20mm OD with 38mm rockwool- type insulation	-/90/30	-/120/30		300
	Pair coil	Up to 9.5 & 19mm with 20mm FR insulation (or 13mm PE)	-/90/30	-/120/30		300
Power Cables -	TPS	Up to 12x 2.5mm² per bundle	-/90/30	-/120/30		300
Copper Core	AS1530.4 Appendix D1 cable set	Applies to copper core power cables and cable trays up to 1000mm wide	-/90/30	-/120/30		600**
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)	-/90/30	-/120/30		300
Communications	RG6 coax	Up to 3x per bundle	-/90/30	-/120/30		300
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/90/30	-/120/30		450
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with or without cables)	-/90/30	-/120/30		300

^{*}Heat trace cables may be installed underneath thermal lagging through a SuperSTOPPER® penetration

^{**}Loose TWrap infill installed onto cable trays for at least 300mm underneath TWrap



90 minute XCEM Alpha Panel walls

Type 3 - 35mm Alpha Panel, framed with stud and lined on the other face with 16mm fire grade plasterboard (91mm minimum thickness).

Type 4 - 35mm Alpha Panel laminated with 16mm fire grade plasterboard.



PVC conduits				FRL (Wra	p Free)**	FRL wit	h TWRAP™
PEX Pipes	Service Type	Serv	ice Specification	Type 3	Type 4		required
PEX Pipes		PVC Conduits	Up to 32mm OD	-/90/60	-/90/30		450
Plastic Pipes Up to 32mm with 19mm E-Flex insulation -/90/60 -/90/30 450			Up to 20mm	-/90/60	-/90/30		450
Plastic Pipes		PEX Pipes	Up to 32mm	-/90/60	-/90/30		450
PEX.Al-PEX pipes				-/90/60	-/90/30		450
Up to 32mm with 19mm E-Flex insulation -/90/30 -/9	Plastic Pipes		Up to 25mm	-/90/60	-/90/30		450
Insulation -790/30 -		PEX-Al-PEX pipes	Up to 32mm	-/90/-	-/90/-		450
CPVC Pipes 40mm to 60mm -/90/60 -/90/30 450				-/90/30	-/90/30		450
A0mm to 60mm -/90/60 -/90/30 450		aDVC Dinas	Up to 40mm	-/90/-	-/90/-		450
Steel		CPVC Pipes	40mm to 60mm	-/90/60	-/90/30		450
Steel	Para Matal Dinas	Copper	Up to 50mm	-/90/-	-/90/30		450
Copper Up to 20mm thick -/90/30 -/90/30 -/90/30 -/90/90 450	Bare Metal Pipes	Steel	up to 60mm	-/90/30	-/90/30		450
Copper Insulation -/90/30 -/				-/90/30	-/90/30		450
Pair coil Up to 20mm OD with 38mm rockwool-type insulation -/90/30 -/90/30 450	Metal Pipes	Copper	·	-/90/30	-/90/30	-/90/90	450
Pair Coll Insulation (or 13mm PE) -/90/30 -/90/30 450				-/90/30	-/90/30		450
Power Cables - Copper Core AS1530.4 Appendix D1 cable set As1530.4 Appendix D1 cable set Applies to copper core power cables and cable trays up to 1000mm wide Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total) -/90/30 -/90/30 -/90/30 -/90/30 450 Communications Cables AS1530.4 Appendix Applies to copper core comms cables including cable trays up to 1000mm wide Applies to copper core comms cables including cable trays up to 1000mm wide -/90/30 -/90/30 -/90/30 -/90/30 -/90/30 -/90/30		Pair coil		-/90/30	-/90/30		450
AS1530.4 Appendix D1 cable set Power Cables Aluminium Core RG6 coax AS1530.4 Appendix D1 cables set AS1530.4 Appendix D1 cables set Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total) -/90/30 -/90/30 -/90/30 -/90/30 450 Communications Cables AS1530.4 Appendix		TPS	Up to 12x 2.5mm² per bundle	-/90/30	-/90/30		450
Power Cables Aluminium Core Single Core cables 4 x 120mm² and 9 x 70mm² per bundle (16x cables total) -/90/30 -/90/30 450 RG6 coax Up to 3x per bundle -/90/30 -/90/30 450 Communications Cables AS1530.4 Appendix Applies to copper core comms cables including cable trays up to cable trays u			cables and cable trays up to	-/90/30	-/90/30		450
Communications Applies to copper core comms Cables AS1530.4 Appendix Cables including cable trays up to 1/90/30 1/90/30 1/90/30 1/90/30		Single Core cables	4 x 120mm ² and 9 x 70mm ² per bundle (16x cables	-/90/30	-/90/30		450
Cables AS1530.4 Appendix Applies to copper core comms Cables including cable trave up to -/90/30 -/90/30 450	Communications	RG6 coax	Up to 3x per bundle	-/90/30	-/90/30		450
1000mm wide		AS1530.4 Appendix D2 cable set	cables, including cable trays up to	-/90/30	-/90/30		450
Conduits Rigid or Flexible PVC Conduits Up to 32mm OD (with or without cables) -/90/60 -/90/30 450	Conduits			-/90/60	-/90/30		450

^{*}Heat trace cables may be installed underneath thermal lagging through a SuperSTOPPER® penetration **Wrap free FRL's require a patch of 60mm Maxilite board 100mm strips on one side of the wall.



120 Minute Plasterboard Stud Walls

Minimum of 2x13mm fire grade plasterboard on each face of steel or timber stud, of minimum 64mm thickness with a stated FRL of -/120/120.



Service Type	Serv	ice Specification	FRL (Wrap Free)	FRL with TWRAP™ (all studs)	TWRAP™ Length required (mm)
	PVC Pipes	Up to 32mm OD	-/120/60		300
	DEV D:	Up to 20mm	-/120/60		300
	PEX Pipes	Up to 32mm	-/120/60		450
Plastic Pipes	PEX-Al-PEX pipes	Up to 20mm	-/120/60		300
	PEX-AI-PEX pipes	Up to 32mm	-/120/-		450
	cPVC Pipes	Up to 40mm	-/120/-		300
	CFVC Pipes	40mm to 60mm	-/120/60		300
Para Matal Dinas	Copper	Up to 50mm	-/120/-		300
Bare Metal Pipes	Steel	up to 60mm	-/120/60		300
		Up to 50mm OD with PE insulation up to 20mm thick	-/120/60		300
Metal Pipes		Up to 50mm OD with FR insulation	-/120/60		300
Insulated*		Up to 20mm OD with 38mm rockwool-type insulation	-/120/60	-/120/120	300
	Pair coil	Up to 9.5 & 19mm with 20mm FR insulation (or 13mm PE)	-/120/60		300
Power Cables -	TPS	Up to 12x 2.5mm² per bundle	-/120/60		300
Copper Core	AS1530.4 Appendix D1 cable set	Applies to copper core power ca- bles and cable trays up to 1000mm wide	-/120/60		600**
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)	-/120/30		300
Communications	RG6 coax	Up to 3x per bundle	-/120/60		300
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/120/60		450**
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with or without cables)	-/120/60		300

^{*}Heat trace cables may be installed underneath thermal lagging through a SuperSTOPPER® penetration


^{**}Loose TWrap infill installed onto cable trays for at least 300mm underneath TWrap



Contents₂

120 Minute Concrete, Masonry and Permanant Formwork Walls

Walls designed as per AS3600 or AS3700 (or otherwise fire tested to achevied the required FRL with a minimum thickness as per the 90mm) including Dincel, AFS, Logicall etc.



Service Type	Se	rvice Specification	FRL (Wrap Free)	FRL with TWRAP™ (all studs)	TWRAP™ Length required (mm)	
	PVC Pipes	Up to 32mm OD	-/120/60		300	
	DEV Div.	Up to 20mm	-/120/60		300	
	PEX Pipes	Up to 32mm	-/120/60		450	
Plastic Pipes		Up to 20mm	-/120/60		300	
riastic ripes	PEX-Al-PEX pipes	Up to 25mm	-/120/60		450	
		Up to 32mm	-/120/0		450	
	DVC Div.	Up to 40mm	-/120/0		300	
	cPVC Pipes	40mm to 60mm	-/120/60		300	
Dave Metal Dines	Copper	Up to 50mm	-/120/0		300	
Bare Metal Pipes	Steel	up to 60mm	-/120/60			300
		Up to 50mm OD with PE insulation up to 20mm thick	-/120/60		300	
Metal Pipes Insulated*	Copper Pair coil	Up to 50mm OD with FR insulation	-/120/60		300	
		Up to 20mm OD with 38mm rockwool- type insulation	-/120/60	-/120/120	300	
		Up to 9.5 & 19mm with 13mm FR insulation	-/120/60		300	
		Up to 9.5 & 19mm with 20mm FR insulation	-/120/60		300	
Power Cables -	TPS	Up to 12x 2.5mm² per bundle	-/120/60		300	
Copper Core	AS1530.4 Appendix D1 cable set	Applies to copper core power cables and cable trays up to 1000mm wide	-/120/60		600#	
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)	-/120/30		300	
	RG6 coax	Up to 3x per bundle	-/120/60		300	
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/120/60		450#	
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with or without cables)	-/120/60		300	

^{*}With or without heat trace cable.

#With 300mm of loose TWrap infill packed around any cable tray services within the wrap.



120 Minute AAC Panels

here to go back to Contents

Hebel, Waslc or other AAC panels 75mm thick with a stated FRL up to -/120/120.

PVC pipes						
PEX Pipes	Service Type		Service Specification			Length required
PEX Pipes Up to 32mm		PVC pipes	Up to 32mm OD	-/120/30		300
Plastic Pipes		DEV Div.	Up to 20mm	-/120/30		300
Plastic Pipes		PEX Pipes	Up to 32mm	-/120/30		450
PEX.AI-PEX pipes	Plastic Pines		Up to 20mm	-/120/30		300
CPVC Pipes Up to 40mm -/120/0 300	riastic ripes	PEX-Al-PEX pipes	Up to 25mm	-/120/30		450
CPVC Pipes Up to 60mm -/120/30 300			Up to 32mm	-/120/0		450
Description Computer Conduite Condui		aDVC Din a a	Up to 40mm	-/120/0		300
Steel		CPVC Pipes	Up to 60mm	-/120/30		300
Steel	Para Matal Dinas	Copper	Up to 50mm	-/120/0		300
Copper Up to 50mm OD with FR insulation -/120/30 300 300	Bare Metal Pipes	Steel	up to 60mm	-/120/30		300
Metal Pipes				-/120/30		300
Description		Up to 20mm OD with 38mm insulation Up to 9.5 & 19mm with 13m Pair coil	Up to 50mm OD with FR insulation	-/120/30	/420/420	300
Pair coil Up to 9.5 & 19mm with 20mm FR insulation -/120/30 300 Power Cables - Copper Core AS1530.4 Appendix D1 cable set Applies to copper core power cables and cable trays up to 1000mm wide Power Cables Aluminium Core Single Core cables Bundles of up to 3 x 240mm², 4 x 120mm², and 9 x 70mm² per bundle (16x cables total) Communications Cables AS1530.4 Appendix D2 cable set RG6 coax Up to 3x per bundle -/120/30 Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide				-/120/30	-/120/120	300
Power Cables - Copper Core AS1530.4 Appendix D1 cables set Communications Cables Communications Cables AS1530.4 Appendix D2 cable set Rigid or Flexible Power Cables Rigid or Flexible AS1530.4 Appendix D2 cables Power Cables AS1530.4 Appendix D2 cables AS1530.4 Appen			Up to 9.5 & 19mm with 13mm FR insulation	-/120/30		300
Power Cables - Copper Core AS1530.4 Appendix D1 cable set Applies to copper core power cables and cable trays up to 1000mm wide Power Cables Aluminium Core Single Core cables Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total) RG6 coax Up to 3x per bundle -/120/30 300 Communications Cables AS1530.4 Appendix D2 cable set Rigid or Flexible Rigid or Flexible Rigid or Flexible Lin to 32mm OD (with or without cables) -/120/60			Up to 9.5 & 19mm with 20mm FR insulation	-/120/30		300
Power Cables Aluminium Core Single Core cables Aluminium Core RG6 coax Up to 3x per bundle (16x cables total) Communications Cables AS1530.4 Appendix D2 cable set Rigid or Flexible Rigid or Flexible Lin to 32mm OD (with or without cables) -/120/30 -/120/30 300 300 450#	Power Cables -	TPS	Up to 12x 2.5mm² per bundle	-/120/30		300
Aluminium Core RG6 coax Up to 3x per bundle Communications Cables AS1530.4 Appendix D2 cable set Rigid or Flexible Rigid or Flexible Lin to 32mm OD (with or without cables) -/120/30 -/120/30 300 300 300 450#	Copper Core			-/120/30		600#
Conduits AS1530.4 Appendix D2 cable set Applies to copper core comms cables, including cable trays up to 1000mm wide Applies to copper core comms cables, including cable trays up to 1000mm wide -/120/30 Applies to copper core comms cables, including cable trays up to 1000mm wide -/120/30 Applies to copper core comms cables, including cables are capled to the community of the community caples are capled to the community caples are capled to the community caples are capled to the capled		Single (ore cables	Bundles of up to $3 \times 240 \text{mm}^2$, $4 \times 120 \text{mm}^2$ and $9 \times 70 \text{mm}^2$ per bundle (16x cables total)	-/120/30		300
Cables AS1530.4 Appendix D2 cable set Applies to copper core comms cables, including cable trays up to 1000mm wide -/120/30 Applies to copper core comms cables, including cable trays up to 1000mm wide -/120/30 Applies to copper core comms cables, including cables are caples as a caple of the community of the caples are caples as a caple of the caple of the caples are capled as a caple of the caple o	_	RG6 coax	Up to 3x per bundle	-/120/30		300
				-/120/30		450#
	Conduits		Up to 32mm OD (with or without cables)	-/120/60		300

^{*}With or without heat trace cable

#With 300mm of loose TWrap infill packed around the services within the wrap.



Speedpanel® Walls

Speedpanel walls of thickness ranging from 51mm (-/60/60), 64mm (-/90/90) and 78mm (-/120/120).

Note 51mm and 64mm Speedpanel walls required additional patch of 30mm Maxilite board on one side of the wall.



Service Type	Si	ervice Specification	51mm Speedpanel + 30mm Maxilite	64mm Speedpanel + 30mm Maxilite	78mm Speedpanel	TWrap Length required (mm)
	PVC pipes	Up to 32mm OD				300
		Up to 20mm				300
	PEX Pipes	Up to 32mm				450
	·	Up to 32mm with 19mm E-Flex** ****insulation				450
Plastic Pipes		Up to 20mm				300
	PEX-AL-PEX pipes	Up to 32mm				450
		Up to 32mm with 19mm E-Flex** insulation				450
	oDVC Dinos	Up to 40mm				300
	cPVC Pipes	Up to 60mm				300
Bare Metal Pipes	Copper	Up to 50mm				300
bare Wetar Fipes	Steel	up to 60mm				300
		Up to 50mm OD with PE insulation up to 20mm thick				300
		Up to 50mm OD with FR insulation	-/60/60 -/90/90 mm on nm PE	-/90/90	-/120/120	300
Metal Pipes Insulated#		Up to 20mm OD with 38mm rockwool-type insulation				300
	Pair coil	Up to 9.5 & 19mm with 13mm PE insulation			300	
	rall coll	Up to 9.5 & 19mm with 20mm FR insulation				300
Power Cables -	TPS	Up to 12x 2.5mm² per bundle				300
Copper Core	AS1530.4 Appendix D1 cable set	Applies to copper core power cables and cable trays up to 1000mm wide				600*
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3×240 mm ² , 4×120 mm ² and 9×70 mm ² per bundle (16x cables total)		-/90/90		300
	RG6 coax	Up to 3x per bundle				300
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide				450*
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with or without cables)				300

#With or without heat trace cable

For specific service based FRL's without using TWrap, refer to report FC10266



Contents>



Trafalgar COREX Shaft Walls

2x laminated Corex boards fixed to one side of a 64mm steel stud. FRL of the wall is related to thickness of the Corex facings as shown in the table. Click here for the Corex Shaft Wall technical Manual.



Service Type	Se	rvice Specification	Corex I & SuperS	Board Speci TOPPER® Po FRL*	fication enetration	TWrap Length required
			2x15mm	2x20mm	2x25mm	(mm)
	PVC Pipes	Up to 32mm OD				450
		Up to 20mm				450
	PEX Pipes	Up to 32mm				450
	. Ext. ipod	Up to 32mm with 19mm E-Flex insulation				450
Diagram Diagram		Up to 20mm				450
Plastic Pipes		Up to 25mm				450
	PEX-Al-PEX pipes	Up to 32mm				450
		Up to 32mm with 19mm E-Flex insulation				450
	aDVC Dinas	Up to 40mm				450
	cPVC Pipes	40mm to 60mm				450
Dave Metal Dines	Copper	Up to 50mm				450
Bare Metal Pipes	Steel	up to 60mm				450
		Up to 50mm OD with PE insulation up to 20mm thick				450
	Copper	Up to 50mm OD with FR insulation	-/60/60 -/90/9i	-/90/90	-/120/120	450
Metal Pipes Insulated**		Up to 20mm OD with 38mm rockwool- type insulation				450
	Pair coil	Up to 9.5 & 19mm with 13mm PE insulation				450
	raii coii	Up to 9.5 & 19mm with 20mm FR insulation				450
	TPS	Up to 12x 2.5mm² per bundle				450
Power Cables - Copper Core	AS1530.4 Appendix D1 cable set	Applies to copper core power cables and cable trays up to 1000mm wide				450
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)				450
	RG6 coax	Up to 3x per bundle				450
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide				450
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with or without cables)				450

For Corex walls, the wall must be thickened on one side with 100mm wide Maxilite, 60mm thick around the penetration.

^{**}Heat trace cables may be installed underneath thermal lagging through a SuperSTOPPER® penetration



^{*}For specific service based FRL's without using TWrap, refer to report FC10266.



Click here to go back to Contents

Maxilite Board Bulkheads and Oversized Penetrations

Maxilite FyreBOARD is commonly used to construct fire rated bulkheads or to seal oversized apertures cut into fire walls. Minimum thickness required 60mm. <u>Click here for the Maxilite technical manuals.</u>



Service Type	S	ervice Specification	FRL (Wrap Free)	FRL with TWRAP™ (all studs)	TWRAP™ Length required (mm)
	PVC Pipes	Up to 32mm OD	-/120/30		300
	DEV Dinos	Up to 20mm	-/120/30		300
	PEX Pipes	Up to 32mm	-/120/30		450
Disastia Disasa		Up to 20mm	-/120/30		300
Plastic Pipes	PEX-Al-PEX pipes	Up to 25mm	-/120/30		450
		Up to 32mm	-/120/0		450
	aDVC Dinas	Up to 40mm	-/120/0		300
	cPVC Pipes	40mm to 60mm	-/120/30		300
Bare Metal Pipes	Copper	Up to 50mm	-/120/0		300
bare Metal Pipes	Steel	up to 60mm	-/120/30		300
		Up to 50mm OD with PE insulation up to 20mm thick	-/120/30		300
	Copper	Up to 50mm OD with FR insulation	-/120/30		300
Metal Pipes Insulated*		Up to 20mm OD with 38mm rockwool-type insulation	-/120/30	-/120/120	300
	Pair coil	Up to 9.5 & 19mm with 13mm FR insulation	-/120/30		300
		Up to 9.5 & 19mm with 20mm FR insulation	-/120/30		300
Power Cables -	TPS	Up to 12x 2.5mm² per bundle	-/120/30		300
Copper Core	AS1530.4 Appendix D1 cable set	Applies to copper core power ca- bles and cable trays up to 1000mm wide	-/120/30		600#
Power Cables Aluminium Core	Single Core cables	Bundles of up to 3 x 240mm², 4 x 120mm² and 9 x 70mm² per bundle (16x cables total)	-/120/30		300
	RG6 coax	Up to 3x per bundle	-/120/30		300
Communications Cables	AS1530.4 Appendix D2 cable set	Applies to copper core comms cables, including cable trays up to 1000mm wide	-/120/30		450#
Conduits	Rigid or Flexible PVC Conduits	Up to 32mm OD (with or without cables)	-/120/30		300

^{*}With or without heat trace cable #With 300mm of loose TWrap infill packed around the services within the wrap.







INSTALLATION STAGE 1:

Slab-Mount the SuperSTOPPER®

ALL WALLS





Mark the location where the wall is to be constructed and position the SuperSTOPPER® Slab-Mount in the desired penetration position.

Ensure that the SuperSTOPPER® will be located centrally to the thickness of the wall.



Separate the bottom section of the SuperSTOPPER®, and the foam end plugs, which are to be put in a safe location for later use.



Fix the top section of the SuperSTOPPER® to the floor slab using **M6 masonry anchors, 4mmx20mm gas or powder actuated anchors** or any other **all-steel anchor** of equal pull out rating through the pre-formed mounting holes at two per side, or 300mm centres.

SERVICES



Install services through the SuperSTOPPER® as required, ensuring all are approved for use. Please refer to the FRL tables for a list of all approved services (NB extra services can be installed at any stage of the SuperSTOPPER® installation).







INSTALLATION STAGE 2: WALL INSTALLATION

PLASTERBOARD AND COREX





Retrieve the bottom section of the SuperSTOPPER® and fit around the services, to the secured top section, confirming that all fixing tabs are properly locked into place.

FRAME



Install the wall's stud framing around the perimeter of the SuperSTOPPER® and fix the plasterboard as per the wall manufacturers instruction, ensuring the annular gaps between the SuperSTOPPER® and wall openings are within 5-20mm and allow for deflection as required.

There is no need to line the opening around a SuperSTOPPER® with plasterboard for 60 minute applications.

Corex Walls require the opening to be lined with the same thickness of Corex board as is used to build the wall.

PLASTER



Plasterboard is applied around the SuperSTOPPER® Slab-Mount, forming annular gaps maximum 20mm.For Corex walls, the wall must be thickened on one side with 100mm wide Maxilite, 60mm thick around the

FINISHING

Complete the installation by following the Stages 3-4 steps outlined on pages 28-29









INSTALLATION STAGE 2: WALL INSTALLATION

AAC PANEL WALL



Install the Hebel® wall's fixing angles on either side of the SuperSTOPPER®



Install the Hebel® wall panel as per the supplier's instructions, ensuring the annular gaps between the SuperSTOPPER® and wall opening are within 5-20mm.

Please note: FyreBOARD Maxilite® collar is not needed if you are planning to use the 3- sided TWRAP $^{\text{m}}$ detail which covers the casing of the SuperSTOPPER® for 90-minute insulation ratings – refer to table on page 13.





Construct a FyreBOARD Maxilite® wall collar, on one side of the penetration, by fixing 30mm thick x 100mm wide FyreBOARD Maxilite® strips around the three exposed sides of the SuperSTOPPER®. Fix FyreBOARD Maxilite® with 10g x 60mm plasterboard screws at 150mm centres and make certain that FyreBOARD Maxilite® is fixed flush with the wall opening (Trafalgar Fire strongly recommends this step is undertaken by a Trafalgar approved SuperSTOPPER® Certification Click to Watch Installation Video







INSTALLATION STAGE 2: WALL INSTALLATION

ALPHA PANEL



Retrieve the bottom section of the SuperSTOPPER® and fit around the services, to the secured top section, confirming that all fixing tabs are properly locked into place.



Install the wall's stud framing around the perimeter of the SuperSTOPPER® and fix the plasterboard as per the wall manufacturers instruction, ensuring the annular gaps between the SuperSTOPPER® and wall openings are within 5-20mm and allow for deflection as required.

Framing only required for AlphaPanel walls that are sheeted with plasterboard on one or both sides, however even walls with just AlphaPanel require plasterboard lining, refer to the drawings at the end of the manual for specifics.



The opening is lined with FR plasterboard to assist with he performance of the SuperSTOPPER® Slab Mount system. Some Alpha Panel Walls need to be thickened with Maxilite. Depending on applications and FRL required, refer to the approvals on page-12 (60 mins) and page-16 (90mins).



Complete the installation by following the Stages 3-4 steps outlined on

pages 28-29









INSTALLATION STAGE 2: WALL INSTALLATION

SPEEDPANEL®



ANGLES



Install the Speedpanel® C-Channel to the full perimeter of the SuperSTOPPER® ensuring the annular gaps between the SuperSTOPPER® and wall opening are within 5-20mm.

Install FR plasterboard to one side of the wall as per Speedpanel® installation specifications.





Install the Speedpanel® wall panel as per the supplier's instructions, ensuring the annular gaps between the SuperSTOPPER® and wall opening are within 5-20mm.





FINISHING

Complete the installation by following the Stages 3-4 steps outlined on

pages 28-29

For Speedpanel® walls less than 78mm construct a FyreBOARD Maxilite® wall collar, on one side of the penetration, by fixing 30mm thick x 100mm wide FyreBOARD Maxilite® strips around the three exposed sides of the SuperSTOPPER®. Fix FyreBOARD Maxilite® with 10g x 60mm plasterboard screws at 150mm centres and make certain that FyreBOARD Maxilite® is fixed flush with the wall opening (Trafalgar Fire strongly recommends this step is undertaken by a Trafalgar Fire approved SuperSTOPPER® Certification Partner).









INSTALLATION STAGE 3: FOAM INSTALLATION

ALL WALLS

Confirm that the installation up to this point has been done in accordance with the requirements for each wall type to ensure compliance.

SEAL

Fill all annular gaps between the SuperSTOPPER® and wall opening with FyreFLEX® Sealant to a depth of 20mm and finish with a 30x30mm fillet on each side of the penetratio (fillet not needed if penetration is wrapped with TWrap).



Retrieve the foam end plugs and cut a horizontal slit allowing you to open the foam. Cut out a rough profile of the services so that the foam can be fit snugly around them. Slide the foam over/around the services and into the SuperSTOPPER®

Please note: 30x30mm FyreFLEX® fillet is not needed if you are planning to use the 3 – sided TWRAP[™] detail as shown on page 29.

FOAM EXAMPLE





Plug any visible gaps in the end plugs with left over foam off cuts or FyreFLEX® Sealant. Note: It is recommended that after the foam is installed, a photograph should be taken for site records to demonstrate a compliant foam installation.









INSTALLATION STAGE 4: WRAPPING

ALL WALLS

If TWRAP $^{\text{m}}$ is required for the services to achieve the insulation rating as described in the tables on pages8-22, install as follows.

WRAP- SERVICES ONLY




In some instances, it is appropriate to For a 60 minutes insulation, simply wrap TWRAP™ around the required (or all services), ensuring each end overlaps itself by 50mm, and butt it up against the SuperSTOPPER®'s foam end plugs. Secure the TWRAP™ in three locations with reinforced aluminium tape or stainless-steel cable ties around the entire circumference. Contact_technical@tgroup.com.au_to see if this is appropriate on your site.

WRAP UP TO 120MIN



For 90 or greater minutes insulation, simply wrap TWRAP™ around the services and SuperSTOPPER® casing, flaring the edges out against the underside of the slab. These edges should overlap the slab by at least 50mm and be held in place by 30x1x300mm flat steel tabs. Refer to install drawing below.

Some instances don't need any TWrap at all, check the FRL tables or contact technical@tgroup.com.au to confirm.

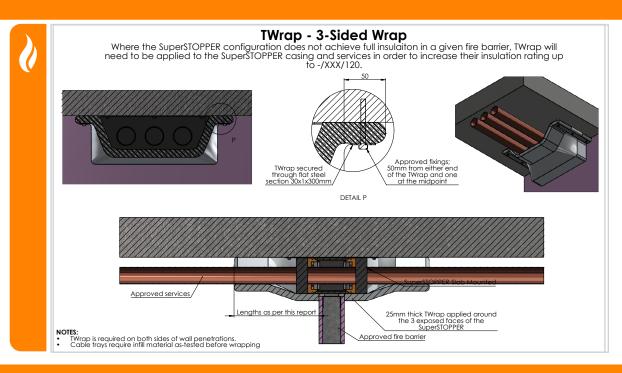












RISER SHAFT



Where the SuperSTOPPER® cannot be centered in the wall due to narrow risers or slab edges being nearby.



The SuperSTOPPER® can be installed offset to the wall using strips of FyreBOARD Maxilite® to locally thicken the penetration.

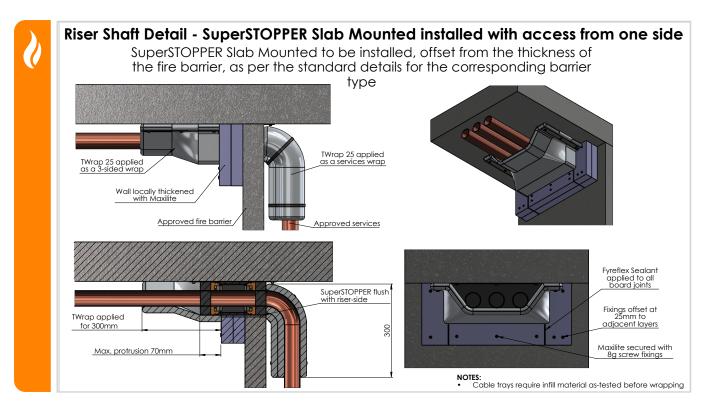









STEPPED SLAB, WALL JUNCTIONS & OVERSIZED OPENINGS

Stepped Slabs


FyreBOARD Maxilite can be used to pack out the gap to the SuperSTOPPER® Slab-

Mount. Suitable for steps up to 60mm, with min 100mm long fixings used to secure the SuperSTOPPER® Slab-Mount to the con-

crete through the Maxilite Board. Refer to


page 52 for Technical Drawing.

Where a step up in the slab is present,



Oversized Openings

For openings cut too large, up to 60mm FyreBOARD Maxilite can be used to pack out the opening and reduce the annular gap. This can also be done on he sides of the SuperSTOPPER® to reduce the width of the penetration. Refer to page 53 for Technical Drawing.

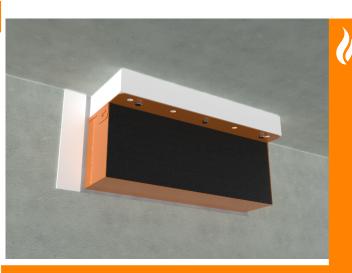

Wall Junctions

For SuperSTOPPER® Slab-Mount systems installed against adjacent barriers, FyreFLEX Sealant is applied to the perimeter (20mm depth) of the box so daylight cant be seen through, and TWrap can be installed 2-sided to the soffit and the wall. **Refer to page** 54 for Technical Drawing.






SUPERSTOPPER® DOUBLE VERTICAL

SUPERSTOPPER® DOUBLE



Where a large run of services needs firestopping in a small width of wall.



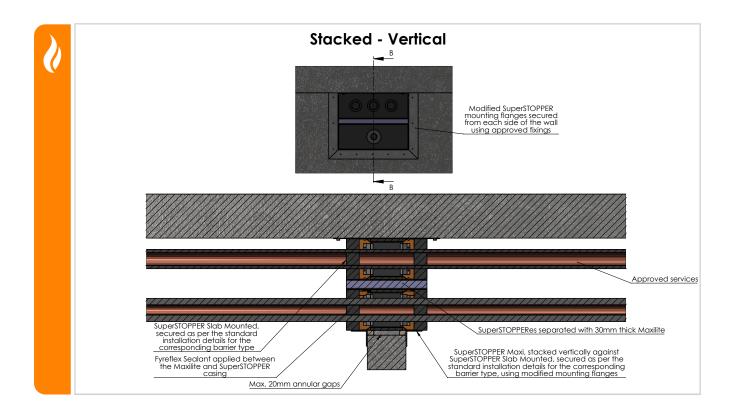










SUPERSTOPPER® DOUBLE HORIZONTAL


DOUBLE HORIZONTAL



For where large amounts of services exit a riser shaft wall.



Double vertical SuperSTOPPER® installed above a doorway to allow for the provision of large amounts of services in a small space.

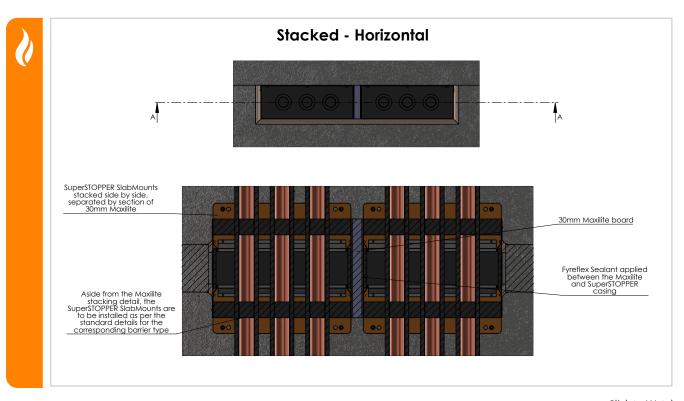









INTRWALL / PARTY WALLS

If TWRAP $^{\text{m}}$ is required for the services to achieve the insulation rating as described in the tables on pages 6-15, install as follows.

STANDARD SUPERSTOPPER®




SuperSTOPPER® top plate, body and approved services all installed as standard to the soffit, with foam end plugs installed around the services.

INSTALL WALL

Install the wall as per the manufacturer's instruction.

1

FINISH

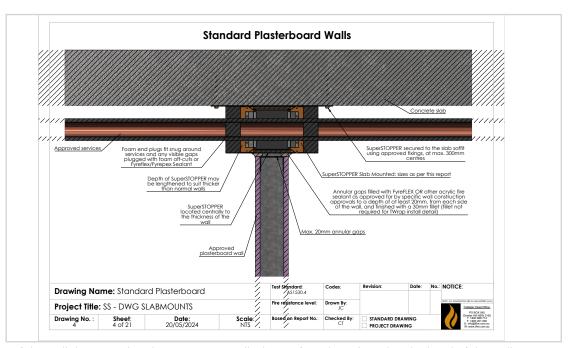

If the wall does not already require it, install a layer of FR plasterboard at the head of the wall.

Install the FyreFLEX Sealant to the full depth of the plasterboard & TWrap to the required length.







INSTALLATION CHECKLIST

PLASTERBOARD

SuperSTOPPER® Label/Identifier		
No.		
Installer Name:		
Company:		
Site:		

Ins	tallation Checklist	Satisfactory	Action Required
1	Is the SuperSTOPPER® located centrally to the thickness of the wall?		
2	Are correct fixings (M6 masonry Anchors, 4mm gas or powder actuated anchors, or any other steel anchor of equal pull out rating) used to fix the top side of SuperSTOPPER® onto the floor slab?		
3	Are there 2 fixings per side, or maximum gap between the anchors at 300mm?		
4	Does the size of the wall opening allow for annular gap between the opening and SuperSTOPPER® within 5 to 20 mm?		
5	Are the services running through the SuperSTOPPER® as per the approved services list on the technical manual?		
6	Is the stud framing around the perimeter of the box installed as per the wall manufacturer's instructions?		
7	Is the sealant applied to correct depth of 20 mm on each side with a (fillet size of approximately 30x30mm) Note: If 3-sided wrap is used, fillet not required		
8	Is the foam snugly fit around the services and any visible gaps covered with foam off-cuts or FyreFLEX® sealant?		
Se	rvices only wrap (if applicable)		
1	Does the TWRAP™ wrap around the services and overlaps itself by 50mm?		
2	Is the TWRAP™ butted against the SuperSTOPPER® foam and end plugs?		
3	Is the TWRAP™ secured in three locations with reinforced aluminium tape or stainless-steel cable ties around the entire circumference?		
3-9	ided wrap (if applicable)		
1	Does the TWRAP™ cover the services including the SuperSTOPPER® and flaring at least 50mm at edges and against the slab?		
2	Is the correct steel tab (30x1x300mm) used to hold the TWRAP™ in place on both sides of the SuperSTOPPER®?		
3	Are correct fixings M6 masonry Anchors used to fix the steel tab and TWRAP™ onto the floor slab, 3x per side?		
4	Is the TWRAP™ butted up against the wall, around the box?		

For a full list of installation instructions, refer to the installation $\underline{pages~23-34}$ of this SuperSTOPPER® Slab-Mount Technical Man-







INSTALLATION CHECKLIST

AAC PANEL WALL

SuperSTOPPER® Label/Identifier	
No.	
Installer Name:	
Company:	
Site:	

Ins	tallation Checklist	Satisfactory	Action Required
1	Is the SuperSTOPPER® located centrally to the thickness of the wall?		
2	Are correct fixings (M6 masonry Anchors, 4mm gas or powder actuated anchors, or any other steel anchor of equal pull out rating) used to fix the top side of SuperSTOPPER® onto the Floor slab?		
3	Are there 2 fixings per side, or maximum gap between the anchors at 300mm?		
4	Does the size of the wall opening allow for annular gap between the opening and SuperSTOPPER® within 5 to 20 mm?		
5	Are the services running through the SuperSTOPPER® as per the approved services list on the technical manual?		
6	Are the Hebel® wall's head track angles installed as per the wall manufacturer's instructions on both sides?		
7	Is the sealant applied to correct depth of 20 mm on each side with a (fillet size of approximately 30x30mm) Note: If 3-sided wrap is used, fillet not required		
8	Is the foam snugly fit around the services and any visible gaps covered with foam off-cuts or FyreFLEX® sealant?		
Se	rvices only wrap (if applicable)		
1	Is the FyreBOARD Maxilite® wall collar constructed correctly? (One side of the penetration using three 30mm thick x 100 mm FyreBOARD Maxilite® strips) *(FyreBOARD Maxilite® collar not needed if planning to use 3-sided TWRAP™)		
2	Are the boards fixed using 10gx60mm plasterboard screws at 150mm centres and flush with the wall opening?		
3	Is the resulting gap sealed with FyreFLEX® Sealant (full depth and fillet size of 30x30mm)?		
4	Does the TWRAP™ wrap around the services and overlaps itself by 50mm? (TWRAP™ only needs to be applied on conductive services)		
5	Is the TWRAP™ butted against the SuperSTOPPER® foam and end plugs?		
6	Is the TWRAP™ secured in three locations with reinforced aluminium tape or stainless-steel cable ties around the entire circumference?		
3-9	ided wrap (if applicable)		
1	Does the TWRAP™ cover the services including the SuperSTOPPER® and flaring at least 50mm at edges and against the slab?		
2	Is the correct steel tab (30x1x300mm) used to hold the TWRAP™ in place on both sides of the SuperSTOPPER®?		
3	Are correct fixings M6 masonry Anchors used to fix the steel tab and TWRAP™ onto the Floor slab, 3x per side?		
4	Is the TWRAP™ butted up against the wall, around the box?		
	a full list of installation instructions, refer to the installation pages 22.24 of this SuperSTODI	DED@ CL 14 1 T	

For a full list of installation instructions, refer to the installation pages 23-34 of this SuperSTOPPER® Slab-Mount Technical








SYSTEM RANGE







Item Number	Description
SuperSTOPPER®-SM-BAMBINO	160 x125 x 250mm
SuperSTOPPER®-SM-350	350 x 125 x 250mm
SuperSTOPPER®-SM-550	550 x 125 x 250mm
SuperSTOPPER®-SM-650	650 x 125 x 250mm
SuperSTOPPER®-SM-Custom	Any size from 100 up to 1250 x 125 x 250mm



SYSTEM COMPONENTS

CLICKABLE CODES Item Number	Description	Min Order Qty
TWRAP- 300 x 810mm	300 x 810 x 25mm Pre Cut Strip	1
TWRAP- 300 x 1010mm	300 x 1010 x 25mm Pre Cut Strip	1
TWRAP Roll- 300mm	300 x7620 x 25mm Full Roll	1
Maxilite Strips SuperSTOPPER® SM 350	1 Strip at 580 x 100 x 30mm 2 Strips at 145 x 100 x 30mm	-





COMPLIANCE



COMPLIANCE WITH THE NATIONAL CONSTRUCTION CODE (NCC)

Formerly known as BCA

Under the NCC requirements, a multiple service transit system for service penetrations should be fire tested in every configuration that it is intended for use in, both completely empty (blank seal), partially full and completely full of services so that the product many be installed with as many or as little services as required on site. It is important to fire test in all the different walls types and with different configurations, quantities and types of services which is a time consuming (and expensive) exercise.

Trafalgar Fire SuperSTOPPER® systems have been fire tested extensively to AS1530.4-2014 and approved in accordance with Section 4 AS4072.1 as required by Schedule 5 of the NCC. This includes over 200 hours of accredited furnace time and 30 plus individual test reports to cover the full range of service and wall configurations that allow us to comfortably stand behind our multiple SYSTEM approvals.

These configurations include but are not limited to:

- Service fill ratio: Empty (blank seal), half full and completely full of services
- Barrier types: Various types of plasterboard, concrete, Blockwork, Hebel®, Walsc®, Speedpanel®, Pronto panel, FyreBOARD Maxilite®, concrete floors, plasterboard ceilings, corex walls etc
- Services: Bare and insulated metal pipes, cable trays and cable bundles, aluminium cables, PVC pipes & conduits, PEX and PEX-AL-PEX pipes, cPVC pipes etc
- Configurations: Blank seal (empty), full of services, double stacked, side by side etc
- Insulation performance: Tested both wrapped and unwrapped with TWRAP™ to ensure the system works in both configurations
- Penetration sizes: 150 x 125, 350x125, 550x125, 1100x125
- SuperSTOPPER® Variants: Slab-Mount, Slab-Mount Bambino, Cast-in, Maxi & Mini (retrofit)

When choosing a multiple service transit penetration system like SuperSTOPPER®, it is important to check that all aspects of your system have been fire tested and are fit for purpose.

Compliance will only be achieved when the installation on site mirrors the tested system.

TEST AND ASSESSMENT REPORTS

The above-mentioned fire testing reports have all been conveniently summarised into **BRANZ** assessment report **FC10266** (available on www.tfire.com.au) which neatly tabulates the approved services in a range of fire barriers, for all SuperSTOPPER® variants and applications, and covers only minor variations to the tested systems, thereby providing trouble free certification according to NCC.

Importantly, every aspect of the assessment report are backed up by the fire test data and the individual fire test reports are available on request for certification purposes.








SuperSTOPPER Slab Mounted - Product Overview ... Depth increased for thicker fire walls (starting at 250mm) 00 Max. 125mm Max. 1250mm Test Standard: Revision: Date: No.: NOTICE: Codes: Drawing Name: SuperSTOPPER Slab Mounted AS1530.4 Fire resistance level: Drawn By: **Project Title:** SS - DWG SLABMOUNTS Drawing No.: **Sheet**: 1 of 21 Date: Scale: Based on Report No.: Checked By: STANDARD DRAWING 20/05/2024 NTS **PROJECT DRAWING**







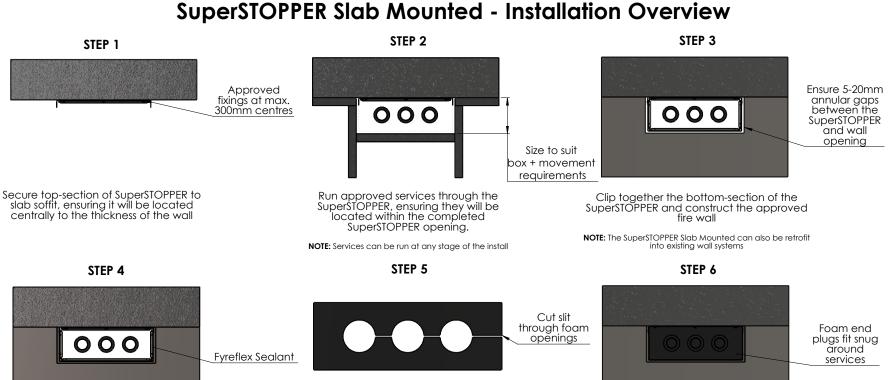

Fill annular gaps with Fyreflex Sealant to a depth of at least 20mm, from each side of the wall Retrieve foam end plugs and form openings to match the services within the
SuperSTOPPER. Cutting a slit through these
openings will allow for the plug to be
opened and inserted around the existing

Fit foam end plugs tightly around the services, from each side of the SuperSTOPPER, and plug any gaps with foam off cuts or Fyreflex/Fyrepex Sealant. Continue to TWrap drawings if wrapping will be required for full insulation.

NOTE: This is a generic installation guide. For specific details relevant to each barrier type, please refer to the corresponding installation drawing.

Duan da Ma	الماليم المالم ما	ion Oversiove		Test Standard:	Codes:	Revision:	Date:	No.:	NOTICE:
prawing No	ime: installat	ion Overview		AS1530.4					
Project Title	: SS - DWG SI	_ABMOUNTS		Fire resistance level:	Drawn By: JC				NOTE: ALL DIMENSIONS ARE IN MILLIMETRES (mm) Trafalgar Head Office: PO BOX 545 Chester Hill NSW 2162
Drawing No.:	Sheet : 2 of 21	Date: 20/05/2024	Scale: NTS	Based on Report No.:	Checked By:	STANDARD DRAV			Chester Hill NSW 2162 T: 1800 888 714 F: 1800 201 500 E: info@tfire.com.au W: www.tfire.com.au







Plasterboard framing details Option A - Full-width nogging between studs Recommeded for areas above fire doors Option B - Head track contoured around opening Recommended for penetrations remote from fire doors Head track Nogging fixed between studs Install orientation not critical

Notes:

- Both options are as-tested
 Both options have been tested without the opening being lined with plasterboard
 When located above fire doors, option A is the recommended installation detail
 Openings are to allow sufficient clearance for building movement


Duanista a Na	Dlaudau			Test Standard:	Codes:	Revision:	Date:	No.:	NOTICE:
Drawing No	ime: Plaster	framing details		AS1530.4					
Project Title	: SS - DWG S	LABMOUNTS	Fire resistance level:	Drawn By:				NOTE: ALL DIMENSIONS ARE IN MILLIMETRES (mm) Trafalgar Head Office: PO BOX 545	
Drawing No. :	Sheet : 3 of 21	Date: 20/05/2024	Scale: NTS	Based on Report No.:	Checked By:	STANDARD DRAW			PO BOX 545 Chester Hill NSW 2162 T: 1800 888 714 F: 1800 201 500 E: info@tfire.com.au W: www.tfire.com.au

Stud framing to wall manufacturers specifications








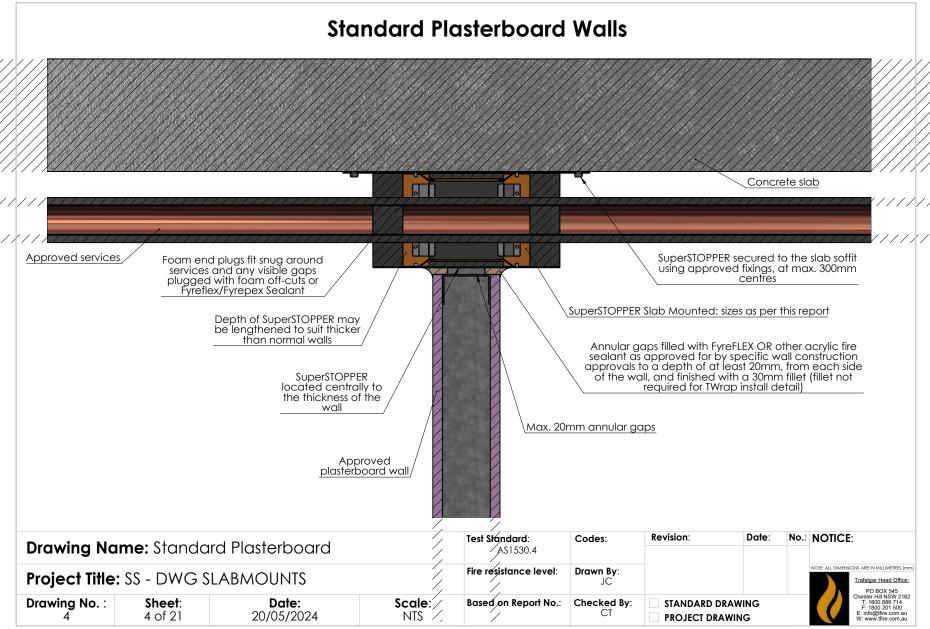








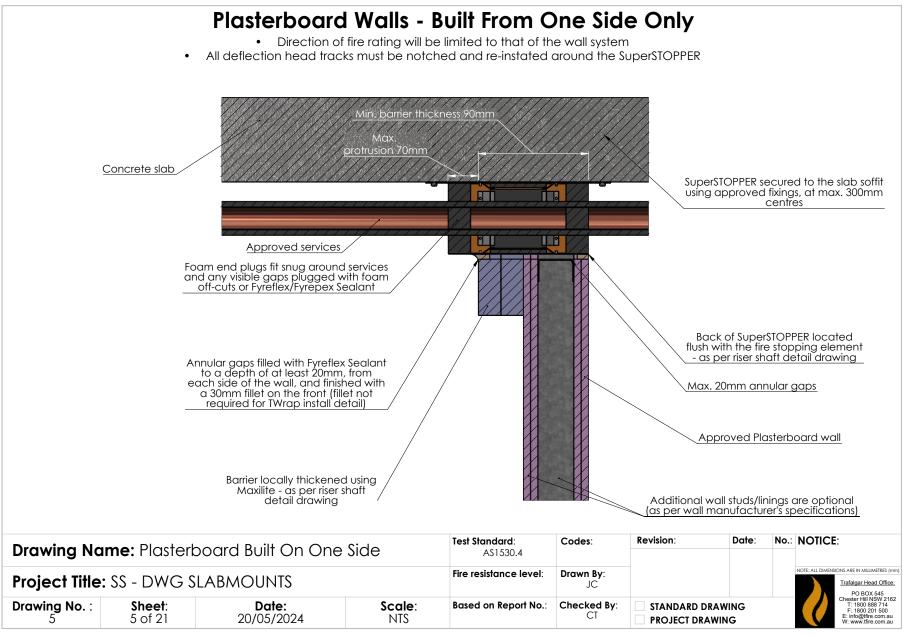








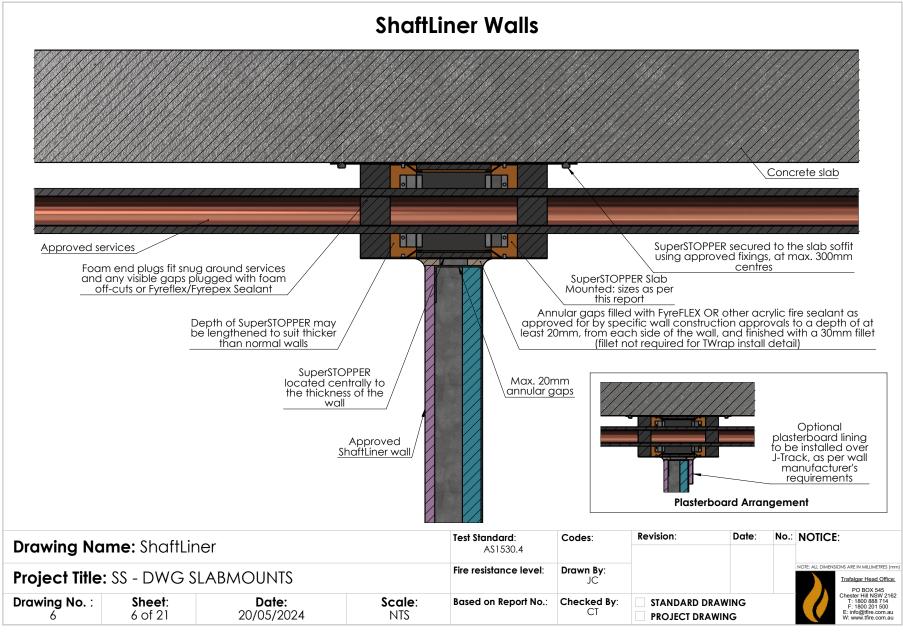







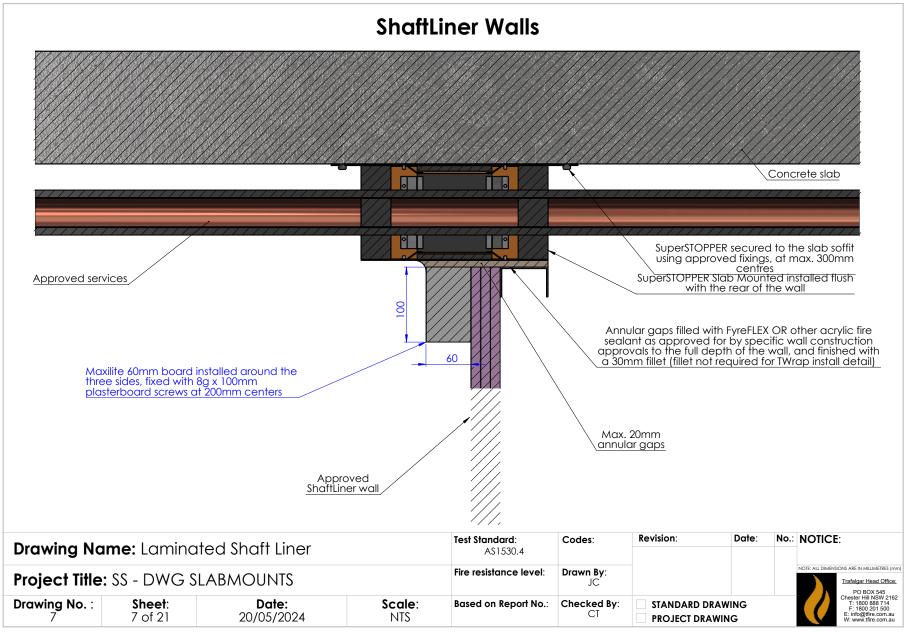










Hebel/Walsc AAC Walls - Openings up to 400x170mm

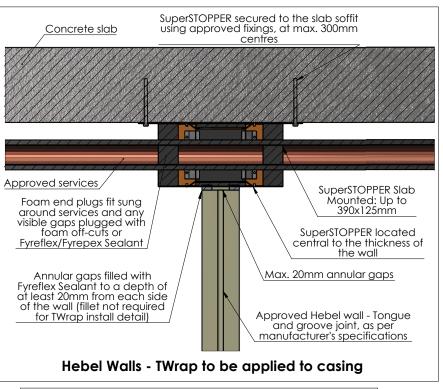

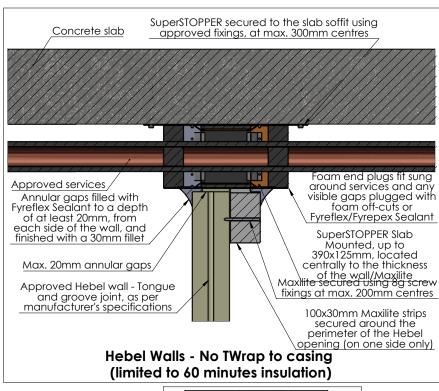

Opening formed centrally over a tongue and groove joint or centrally to the full panel to manufacturers specifications

Hebel Opening




Drawing Name: Hebel/Walsc - Small Openings				Test Standard:	Codes:	Revision:	Date:	No.: NOTICE:
Drawing No	ime: nebel/	waise - smail Oper	iirigs	AS1530.4				
Project Title	: SS - DWG S	LABMOUNTS		Fire resistance level:	Drawn By: JC			NOTE: ALL DIMENSIONS ARE IN MILLIMETRES (mm) Trafalgar Head Office; PO BOX 545
Drawing No.:	Sheet : 8 of 21	Date: 20/05/2024	Scale: NTS	Based on Report No.:	Checked By:	STANDARD DRAW		PO BOX 545 Chester Hill NSW 2162 T: 1800 888 714 F: 1800 201 500 E: info@tire.com.au W: www.tfire.com.au







Hebel/Walsc AAC Walls - Openings greater than 400x170mm

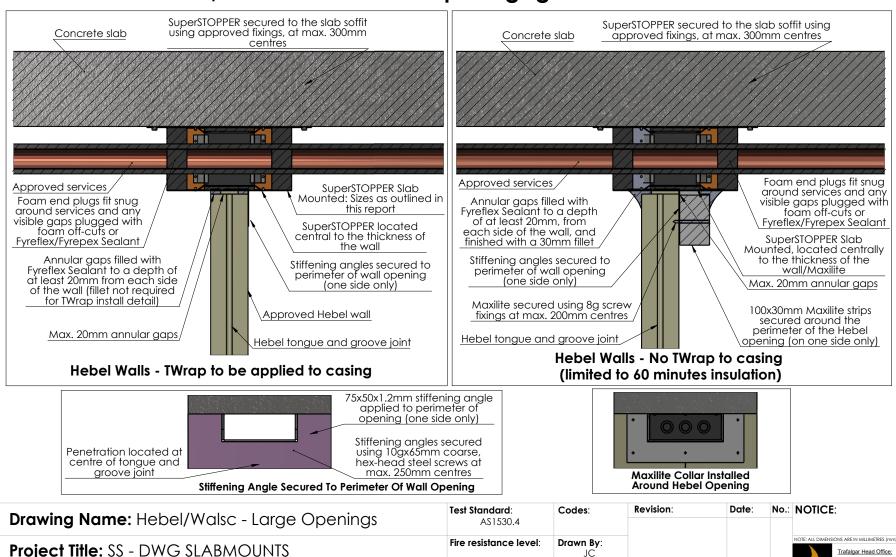



Drawing No. :

Sheet:

9 of 21

Date:

20/05/2024

Trafalgar Head Office:
PO BOX 545
Chester Hill NSW 2162
T: 1800 888 714
F: 1800 201 500

Based on Report No.:

Checked By:

CT

STANDARD DRAWING


PROJECT DRAWING

Scale:

NTS






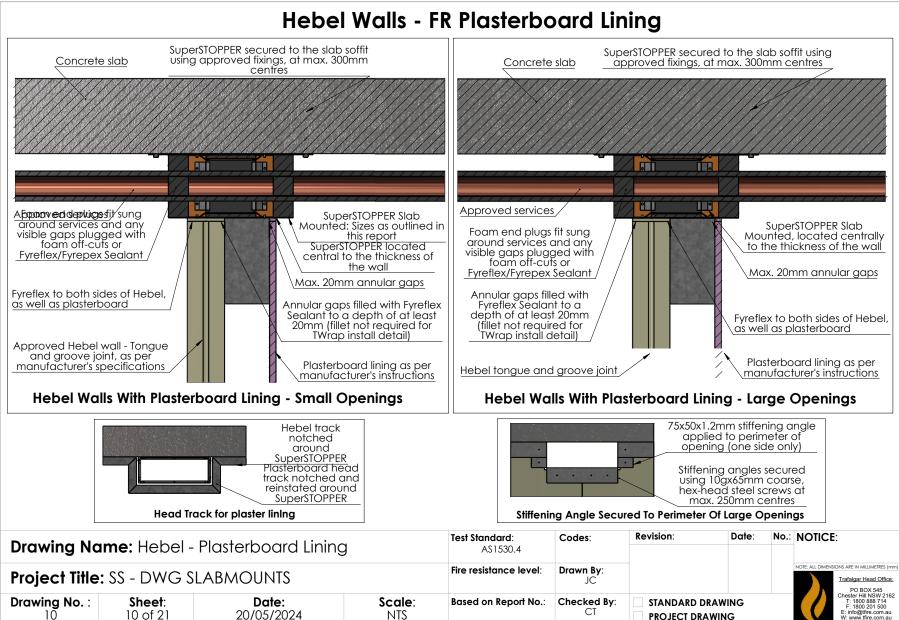








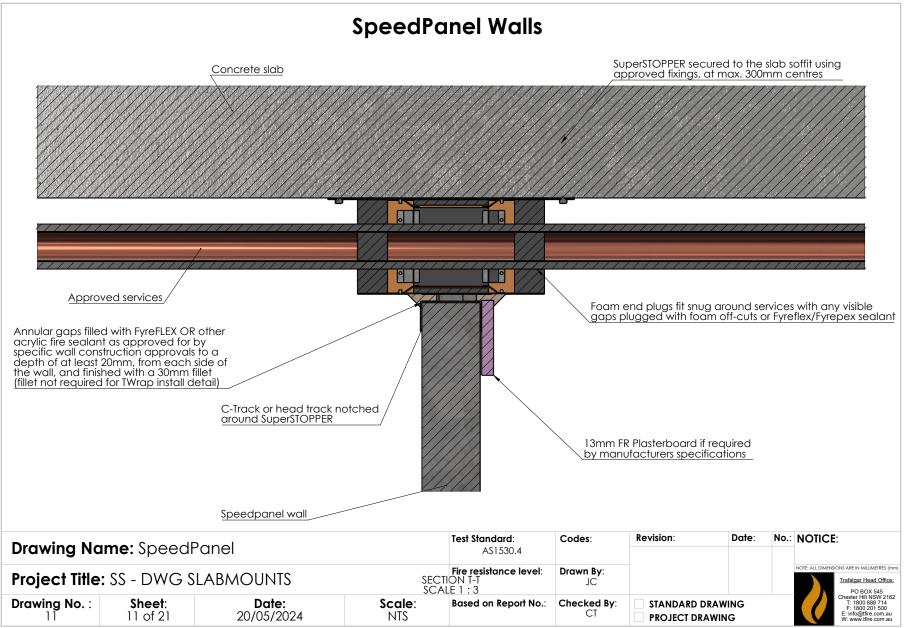








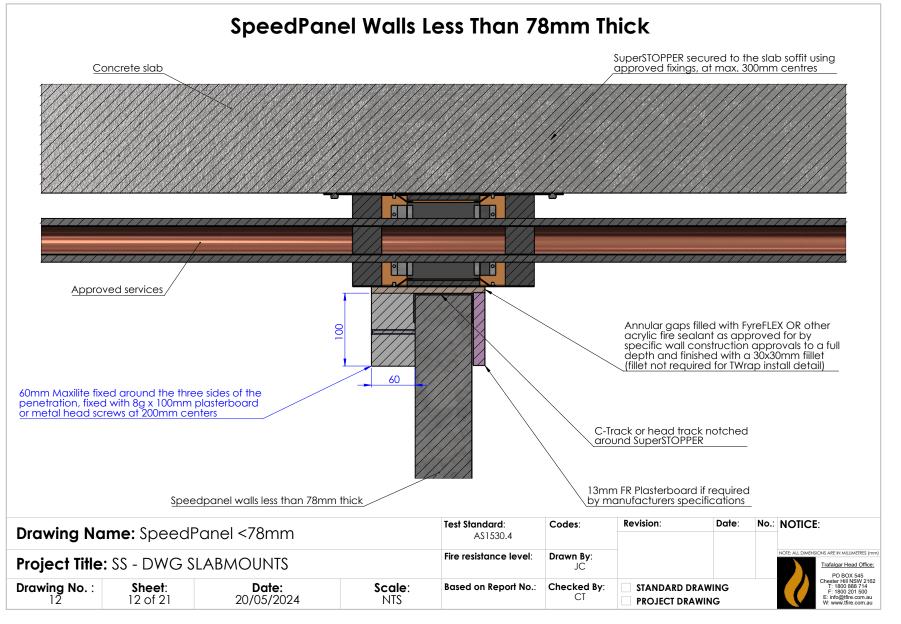








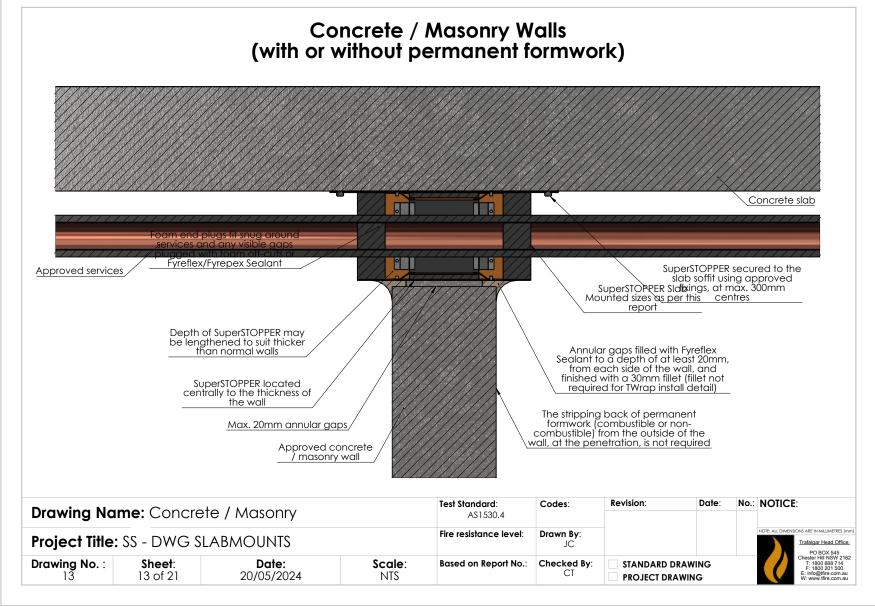








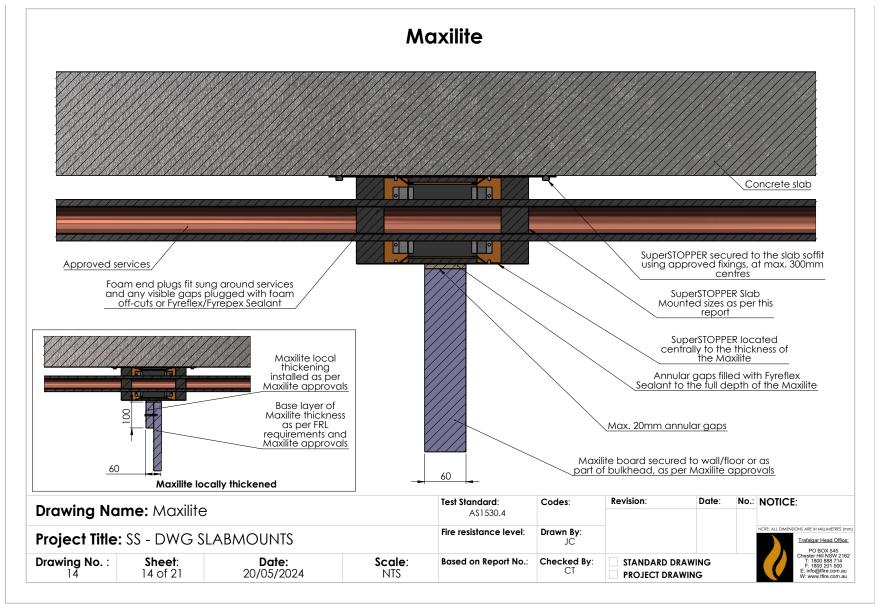








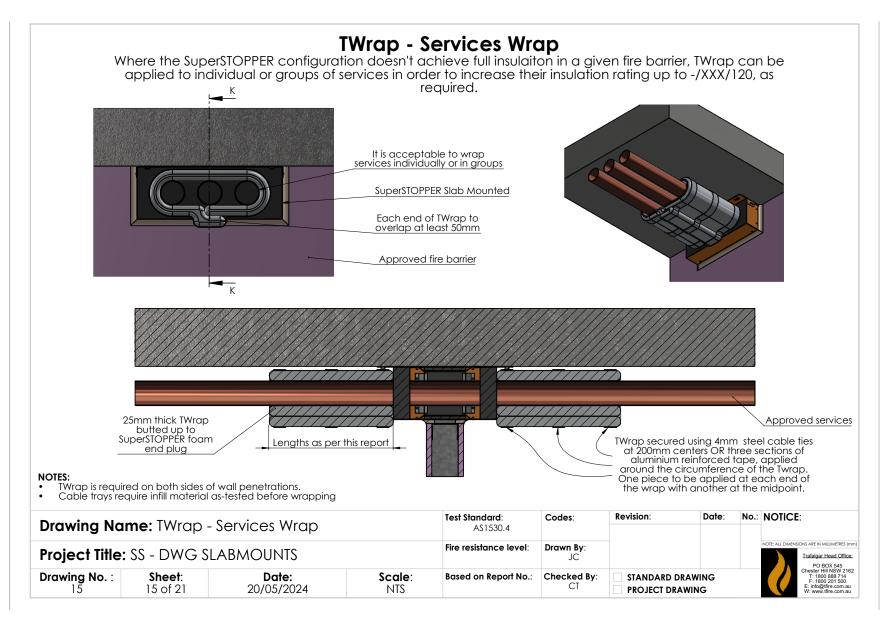








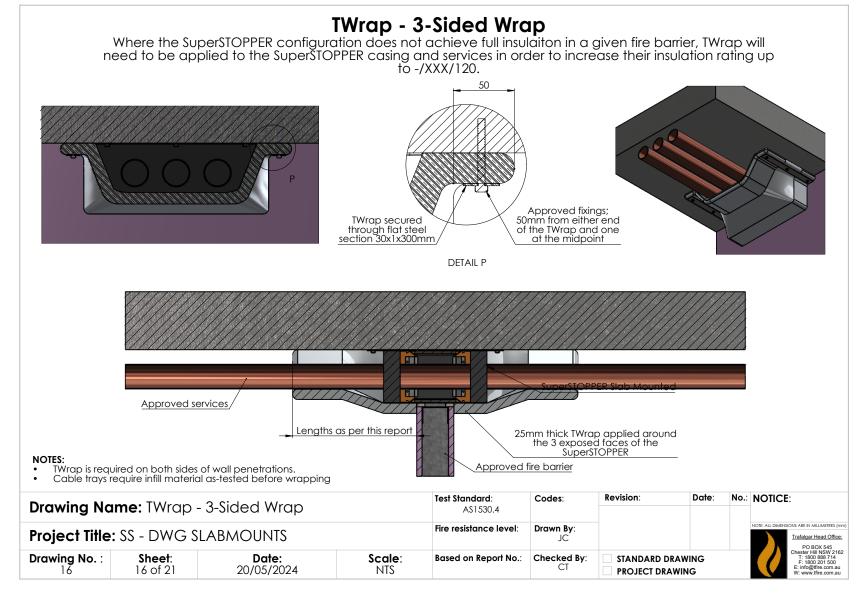








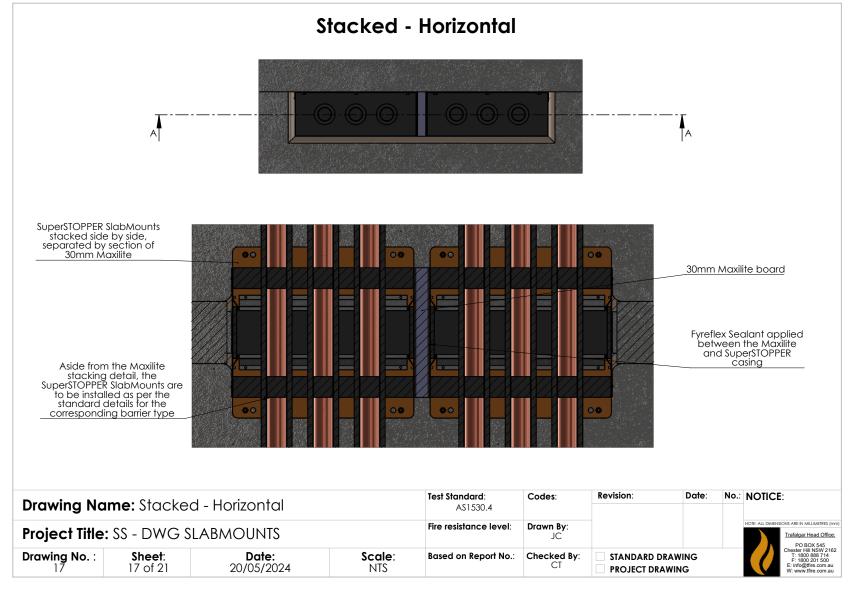








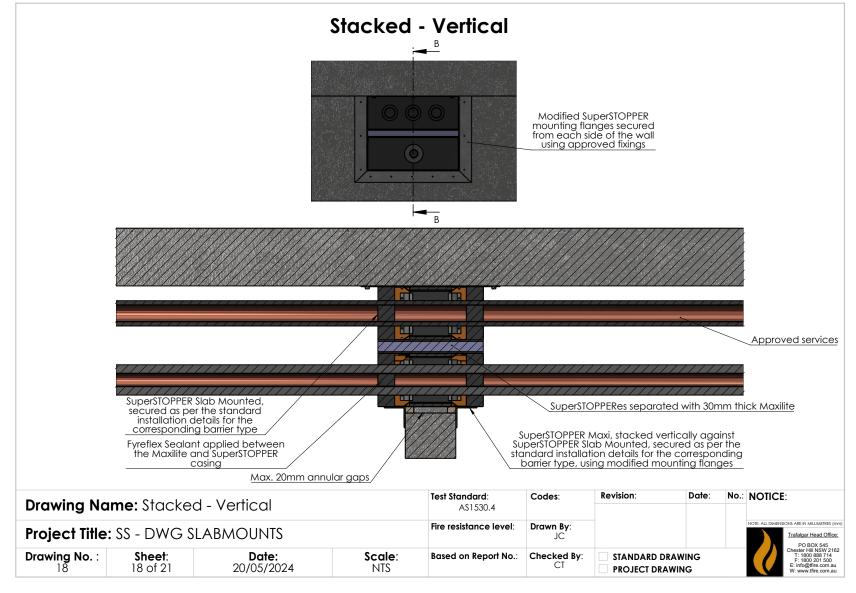








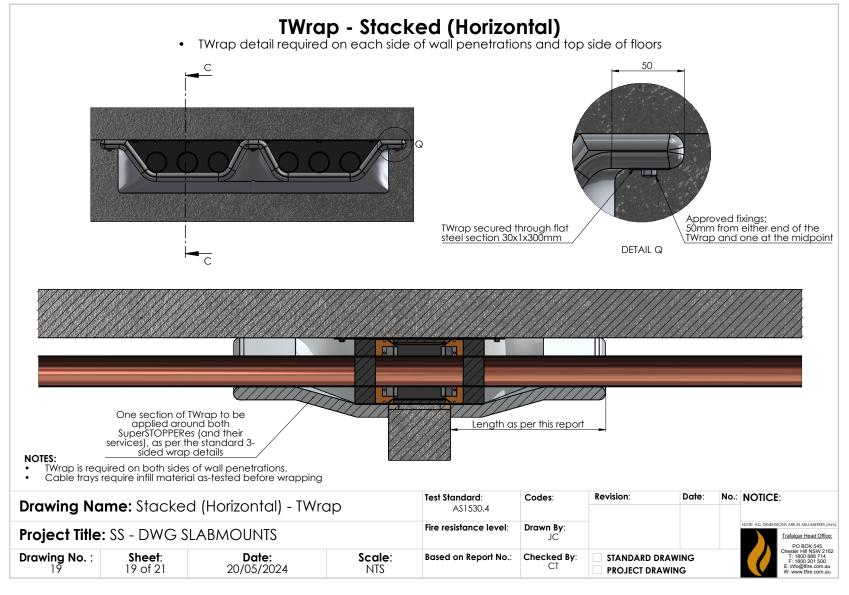








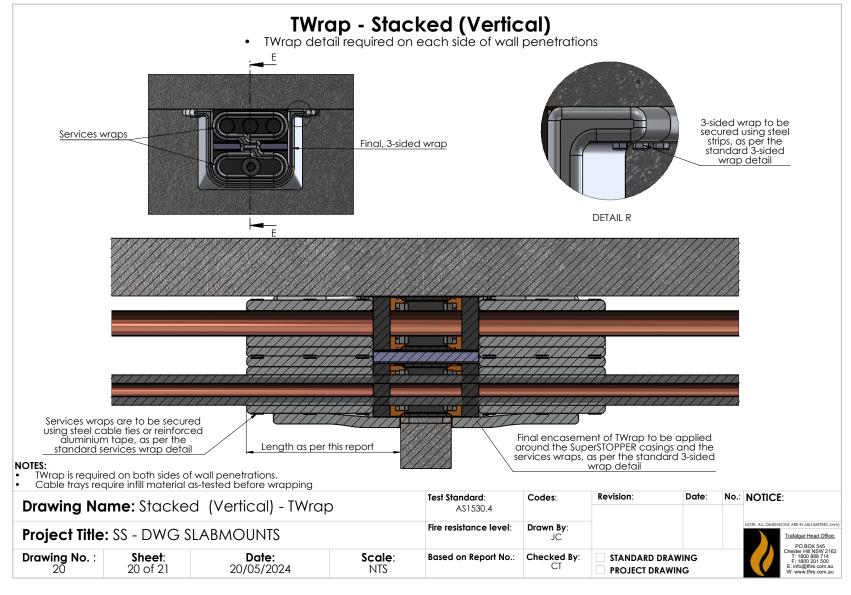







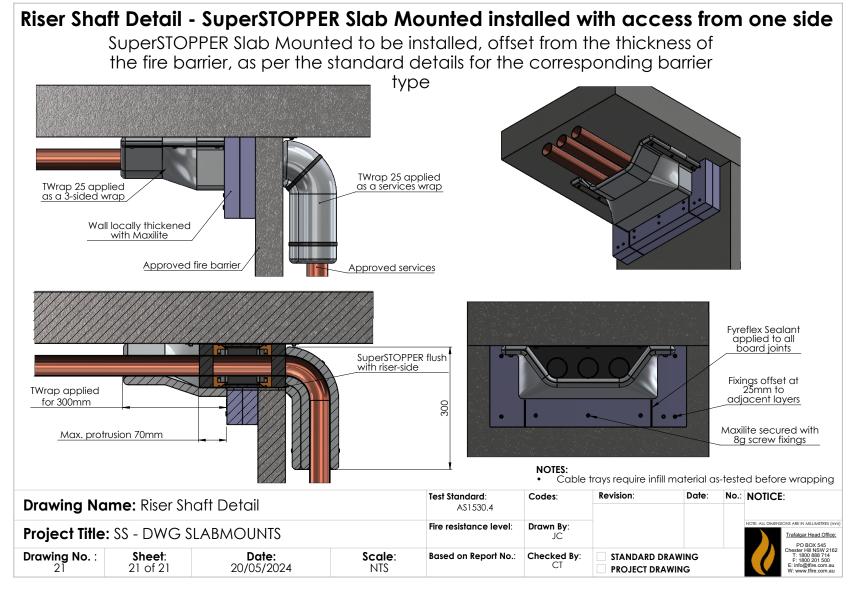











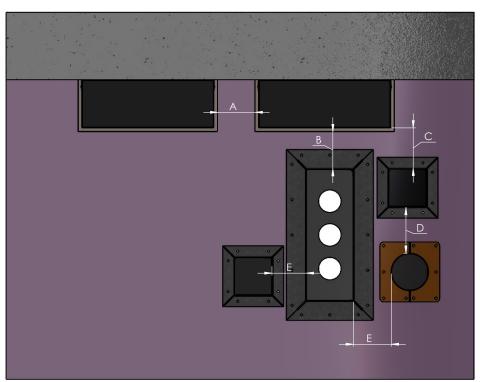



Key	SuperSTOPPER Configuration	Minimum Separation Requirment (between holes in wall)
Α	SlabMount to SlabMount	200mm of barrier between openings
В	SlabMount to Maxi	100mm of barrier between openings
С	SlabMount to Mini	100mm of barrier between openings
D	Mini to Mini OR Maxi to Maxi	100mm of barrier between openings
E	Mini to Maxi	100mm of barrier between openings

NOTES:

- Barrier must be designed or approved for the openings/spacing required.
- Double-Stacking Maxi/Slab-Mount boxes allows closer penetrations.
- For separtion distances between non-Superstopper penetrations contact Trafalgar PRIOR to installation.

Durani da ar Mar	· D - · 1···		Test Standard:	Codes:	Revision:	Date:	No.:	NOTICE:	
prawing Na	me: Penetro	ation Separation - V	A\$1530.4						
Project Title:	: SuperSTOP	PER Install Variation	Fire resistance level:	Drawn By:				NOTE: ALL DIMENSIONS ARE IN MILLIMETRES (mm. Trafalgar Head Office: PO BOX 545	
Drawing No.:	Sheet : 3 of 9	Date: 14/05/2024	Scale: NTS	Based on Report No.:	Checked By:	STANDARD DRAV			PO BOX 545 Chester Hill NSW 2162 T: 1800 888 714 F: 1800 201 500 E: info@tfire.com.au W: www.tfire.com.au

